

# TEGO® Airex 978

Highly efficient deaerator for radiation-curing printing ink and high solids floor coating applications



## Outstanding deaeration performance with good compatibility



Foam generated during the production and application of high solid and high viscosity formulations – such as screen inks, floor coatings and industrial coatings – can be very stable and difficult to eliminate. TEGO® Airex 978 was developed to address this challenge.

This 100% active, siloxane-based deaerator offers high efficiency, while still maintaining good system compatibility. TEGO® Airex 978 is not only suitable for radiation-curing, high solids and solvent-free formulations. It can also be used in certain low viscosity formulations at low dosage to eliminate serious foaming issues.

### TEGO® Airex 978 – At a Glance



#### Superior performance

- Strong effectiveness against micro and macro-foam
- Good compatibility
- Suitable for pigmented systems



#### Versatile

- Recommended for radiation-curing, solvent-borne and high solids systems
- Printing Inks, Flooring Coatings, Industrial Coatings



#### Composition

- 100% active deaerator concentrate
- Siloxane-based
- Solvent-free



[Click here for more information!](#)

## TEGO® Airex 978 shows excellent performance in radiation-curing screen printing inks




### Key Attributes:

- Excellent overall print quality
- Outstanding deaerating effect
- Good system compatibility



TEGO® Airex 978

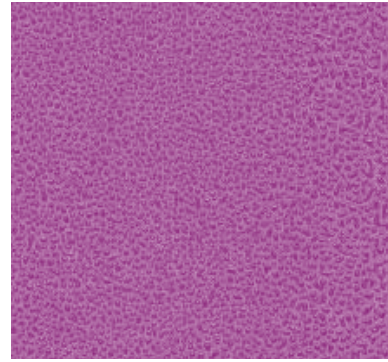

Blank

## TEGO® Airex 978 is highly recommended for floor coatings




### Key Attributes:

- Excellent deaerating effect
- Good compatibility
- Highly suitable in Solvent-free 2K epoxy and 2K PU as well as solvent-based systems



TEGO® Airex 978

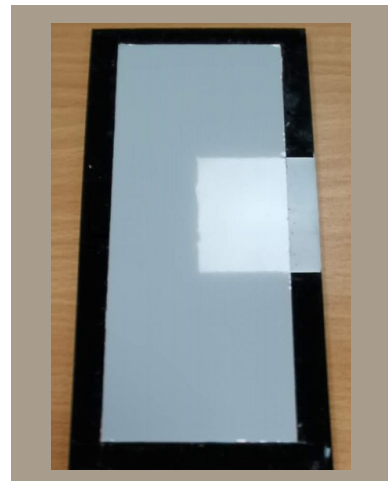

Competitor

This information and any recommendations, technical or otherwise, are presented in good faith and believed to be correct as of the date prepared. Recipients of this information and recommendations must make their own determination as to its suitability for their purposes. In no event shall Evonik assume liability for damages or losses of any kind or nature that result from the use of or reliance upon this information and recommendations. EVONIK EXPRESSLY DISCLAIMS ANY REPRESENTATIONS AND WARRANTIES OF ANY KIND, WHETHER EXPRESS OR IMPLIED, AS TO THE ACCURACY, COMPLETENESS, NONINFRINGEMENT, MERCHANTABILITY AND / OR FITNESS FOR A PARTICULAR PURPOSE (EVEN IF EVONIK IS AWARE OF SUCH PURPOSE) WITH RESPECT TO ANY INFORMATION AND RECOMMENDATIONS PROVIDED. Reference to any trade names used by other companies is neither a recommendation nor an endorsement of the corresponding product, and does not imply that similar products could not be used. Evonik reserves the right to make any changes to the information and/or recommendations at any time, without prior or subsequent notice. ACEMATT®, ADDID®, AEROSIL®, AIRASE®, ALBIDUR®, CARBOWET®, DYNOL™, NANOCRYL®, SILIKOFTAL®, SILIKOPHEN®, SILIKOPON®, SILIKOPUR®, SILIKOTOP®, SIPERNAT®, SURFYNOL®, TEGO®, TEGOMER® and ZETASPERSE® are registered trademarks of Evonik Industries or its subsidiaries. Evonik supports you in selecting the best suited product and optimizing current formulations through our Application Technology Group.

**EVONIK OPERATIONS GMBH**  
Goldschmidtstraße 100  
45127 Essen  
Germany  
Phone +49 201 173-2222  
Fax +49 201 173-1939  
coating-additives@evonik.com  
[www.coating-additives.com](http://www.coating-additives.com)