

Technical Information

SEPURAN® N₂ – 6 inch standard

CONTENT

I.	SEPURAN® – N2 Cart 150x1310 A 16	99133744
II.	SEPURAN® – N2 Cart 150x1310 A 25	99106621
III.	SEPURAN® – N2Sys 150x1310 P1.5G 6 16EN	99142104
IV.	SEPURAN® – N2Sys 150x1310 P1.5G 6 16AS	99141882
V.	SEPURAN® – N2Sys 150x1310 P2.0N 6 16AE	99133946
VI.	SEPURAN® – N2Sys 150x1310 P2.0N 6 16CN	99141774
VII.	SEPURAN® – N2Sys 150x1310 P2.0N 6 25AE	99111367
VIII.	SEPURAN® – N2Sys 150x1310 P2.0N 6 25CN	99122991
IX.	SEPURAN® – N2Sys 150x1310 P1.5F 6 25EN	99142729
X.	SEPURAN® – N2Sys 150x1310 P1.5F 6 25AS	99142727

Technical Information

SEPURAN® N₂ Cartridge

SEPURAN® – N₂ Cart 150x1310 A 16




SEPURAN® N₂ cartridge (sample picture)

Associated documents:

- User manual SEPURAN® N₂ cartridge
- Technical drawing

SEPURAN® N₂ is a hollow fiber membrane gas separator that is used to remove oxygen from compressed air, resulting in N₂ purities between 95–99.5%. The polymer is specially tailored for nitrogen generation. Unlike other gas separation membranes, **SEPURAN® N₂** membranes are characterized by a very high flow capacity with a very good air factor, resulting in the optimization of compression and operating cost.

DIMENSIONS

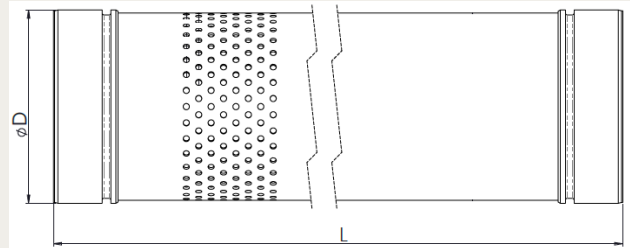

Max diameter – D	154.8 mm 6.09 inch
Total length – L	1 310 mm 51.57 inch
Weight	9.3 kg 20.5 lbs
Drawing number	EVK-Cart_6N-1-C-V02-A

For more specific dimensions of the cartridge, please use the corresponding technical drawing.

SPECIFICATIONS

External material cartridge tube	Aluminium
Operating pressure Permeate side	≥ 0.0 barg ≥ 0.0 psig
Transmembrane pressure	≤ 16.0 bar ≤ 232.0 psi
Max. operating feed pressure¹	≤ 16.0 barg ≤ 232.0 psig
Max. actual permeate flow rate	≤ 200 Am ³ /h ≤ 117.8 acfm
To be used with	Pre-treated pressurized air
Other Gases	Contact the supplier
Permitted temperature range	1 - 70°C 34 - 158°F
Inlet air requirements	Particles, aerosols: ISO 8573-1:2010 class [1:-:1] Condensation of water must be avoided

¹The specified transmembrane pressure (TMP) must not be exceeded under any circumstances.

CHARACTERISTIC PERFORMANCE DATA

	N2 produced in Nm ³ /h at 7.0 barg; 25°C in scfm at 102.0 psig; 77°F ²	Air / N2 ratio
99%	19.1 11.9	3.7
98%	27.2 17.0	2.9
97%	34.7 21.7	2.5
96%	42.3 26.5	2.3
95%	50.4 31.5	2.1

The composition of the product was determined by measurement of the residual oxygen content. The “N2 produced” value is the inert gas content. The pressure is the retentate pressure, namely N2 produced stream discharge pressure. The inlet air divided by “N2 produced” gives the air factor or air/N2 ratio. The lower the air factor, the lower the investment and operating costs.

CAUTION

Nitrogen gas is colorless, odorless and nonflammable. It is non-toxic but may cause asphyxiation by displacement of oxygen. Ensure proper ventilation. Oxygen is a colorless, odorless and oxidizing gas. It is non-toxic, but at high concentrations in the atmosphere it accelerates combustion and increases the risk of fire and explosion of combustible or flammable materials.

OPERATION

The proper operation of **SEPURAN® N2** cartridges is described in the associated user manual.

PRODUCT CODE	PRODUCT NAME
99133744	SEPURAN® - N2 Cart 150x1310 A 16

² Norm = 0°C, 1 atm | 32°F, 1 atm;
Standard = 15.5°C, 1 atm | 60°F, 1 atm

Disclaimer

This information and any recommendations, technical or otherwise, are presented in good faith and believed to be correct as of the date prepared. Recipients of this information and recommendations must make their own determination as to its suitability for their purposes. In no event shall Evonik assume liability for damages or losses of any kind or nature that result from the use of or reliance upon this information and recommendations. EVONIK EXPRESSLY DISCLAIMS ANY REPRESENTATIONS AND WARRANTIES OF ANY KIND, WHETHER EXPRESS OR IMPLIED, AS TO THE ACCURACY, COMPLETENESS, NON-INFRINGEMENT, MERCHANTABILITY AND/OR FITNESS FOR A PARTICULAR PURPOSE (EVEN IF EVONIK IS AWARE OF SUCH PURPOSE) WITH RESPECT TO ANY INFORMATION AND RECOMMENDATIONS PROVIDED. Reference to any trade names used by other companies is neither a recommendation nor an endorsement of the corresponding product, and does not imply that similar products could not be used. Evonik reserves the right to make any changes to the information and/or recommendations at any time, without prior or subsequent notice.

Evonik Fibres GmbH
Gewerbepark 4
4861 Schörfling/Austria

Phone +43 7662 6006-0
sepuran@evonik.com
www.evonik.com/sepuran
www.membrane-separation.com

Technical Information

SEPURAN® N₂ Cartridge

SEPURAN® – N₂ Cart 150x1310 A 25




SEPURAN® N₂ cartridge (sample picture)

Associated documents:

- User manual SEPURAN® N₂ cartridge
- Technical drawing

SEPURAN® N₂ is a hollow fiber membrane gas separator that is used to remove oxygen from compressed air, resulting in N₂ purities between 95–99.5%. The polymer is specially tailored for nitrogen generation. Unlike other gas separation membranes, **SEPURAN® N₂** membranes are characterized by a very high flow capacity with a very good air factor, resulting in the optimization of compression and operating cost.

DIMENSIONS

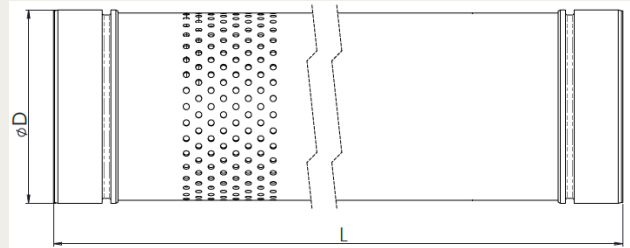

Max diameter – D	154.8 mm 6.09 inch
Total length – L	1 310 mm 51.57 inch
Weight	9.3 kg 20.5 lbs
Drawing number	EVK-Cart_6N-1-C-V02-A

For more specific dimensions of the cartridge, please use the corresponding technical drawing.

SPECIFICATIONS

External material cartridge tube	Aluminium
Operating pressure Permeate side	≥ 0.0 barg ≥ 0.0 psig
Transmembrane pressure	≤ 25.0 bar ≤ 362.6 psi
Max. operating feed pressure¹	≤ 25.0 barg ≤ 362.6 psig
Max. actual permeate flow rate	≤ 200 Am ³ /h ≤ 117.8 acfm
To be used with	Pre-treated pressurized air
Other Gases	Contact the supplier
Permitted temperature range	1 – 70°C 34 – 158°F
Inlet air requirements	Particles, aerosols: ISO 8573-1:2010 class [1:-:1] Condensation of water must be avoided

¹The specified transmembrane pressure (TMP) must not be exceeded under any circumstances.

CHARACTERISTIC PERFORMANCE DATA

	N2 produced in Nm ³ /h at 7.0 barg; 25°C in scfm at 102.0 psig; 77°F ²	Air / N2 ratio
99%	19.1 11.9	3.7
98%	27.2 17.0	2.9
97%	34.7 21.7	2.5
96%	42.3 26.5	2.3
95%	50.4 31.5	2.1

The composition of the product was determined by measurement of the residual oxygen content. The “N2 produced” value is the inert gas content. The pressure is the retentate pressure, namely N2 produced stream discharge pressure. The inlet air divided by “N2 produced” gives the air factor or air/N2 ratio. The lower the air factor, the lower the investment and operating costs.

CAUTION

Nitrogen gas is colorless, odorless and nonflammable. It is non-toxic but may cause asphyxiation by displacement of oxygen. Ensure proper ventilation. Oxygen is a colorless, odorless and oxidizing gas. It is non-toxic, but at high concentrations in the atmosphere it accelerates combustion and increases the risk of fire and explosion of combustible or flammable materials.

OPERATION

The proper operation of **SEPURAN® N2** cartridges is described in the associated user manual.

PRODUCT CODE	PRODUCT NAME
99106621	SEPURAN® – N2 Cart 150x1310 A 25

² Norm = 0°C, 1 atm | 32°F, 1 atm;
Standard = 15.5°C, 1 atm | 60°F, 1 atm

Disclaimer

This information and any recommendations, technical or otherwise, are presented in good faith and believed to be correct as of the date prepared. Recipients of this information and recommendations must make their own determination as to its suitability for their purposes. In no event shall Evonik assume liability for damages or losses of any kind or nature that result from the use of or reliance upon this information and recommendations. EVONIK EXPRESSLY DISCLAIMS ANY REPRESENTATIONS AND WARRANTIES OF ANY KIND, WHETHER EXPRESS OR IMPLIED, AS TO THE ACCURACY, COMPLETENESS, NON-INFRINGEMENT, MERCHANTABILITY AND/OR FITNESS FOR A PARTICULAR PURPOSE (EVEN IF EVONIK IS AWARE OF SUCH PURPOSE) WITH RESPECT TO ANY INFORMATION AND RECOMMENDATIONS PROVIDED. Reference to any trade names used by other companies is neither a recommendation nor an endorsement of the corresponding product, and does not imply that similar products could not be used. Evonik reserves the right to make any changes to the information and/or recommendations at any time, without prior or subsequent notice.

Evonik Fibres GmbH

Gewerbepark 4
4861 Schörfling/Austria

Phone +43 7662 6006-0
sepuran@evonik.com
www.evonik.com/sepuran
www.membrane-separation.com

Technical Information

SEPURAN® N₂ System

SEPURAN® – N2Sys 150x1310 P1.5G 6 16EN




SEPURAN® N₂ system (sample picture)

Associated documents:

- User manual SEPURAN® N₂ system
- Technical drawing

SEPURAN® N₂ is a hollow fiber membrane gas separator that is used to remove oxygen from compressed air, resulting in N₂ purities between 95–99.5%. The polymer is specially tailored for nitrogen generation. Unlike other gas separation membranes, SEPURAN® N₂ membranes are characterized by a very high flow capacity with a very good air factor, resulting in the optimization of compression and operating cost.

DIMENSIONS

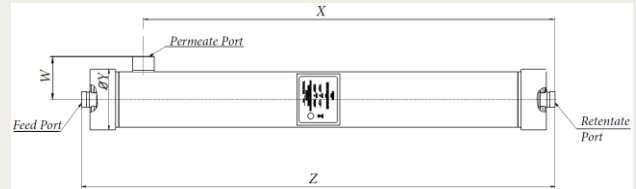

Permeate port – W	136 mm 5.35 inch
Permeate port – X	1 259 mm 49.57 inch
Max diameter – Y	184 mm 7.24 inch
Total length – Z	1 448 mm 57.01 inch
Feed / Retentate connection	BSPP–Thread 1" and Victaulic 1½"
Permeate connection	BSPP–Thread 1½" and Victaulic 2"
Weight	38.3 kg 84.4 lbs
Drawing number	EVK–Hsg 6N–1 1.5–1.0G 6 25EN–C–V01–A

For more specific dimensions of the system, please use the corresponding technical drawing.

SPECIFICATIONS

Design, manufacturing and testing acc. to	EN
External material housing	SS 316 – 1.4404
External material cartridge tube	Aluminium
Operating pressure Feed- / Retentate side	≤ 16.0 barg ≤ 232.0 psig
Operating pressure Permeate side	≥ 0.0 barg ≥ 0.0 psig
Transmembrane pressure¹	≤ 16.0 bar ≤ 232.0 psi
Max. actual permeate flow rate	≤ 200 Am ³ /h ≤ 117.8 acfm
To be used with	Pre-treated pressurized air
Other Gases	Contact the supplier
Permitted temperature range	1 – 70°C 34 – 158°F
Inlet air requirements	Particles, aerosols: ISO 8573-1:2010 class [1:-:1] Condensation of water must be avoided

¹The specified transmembrane pressure (TMP) must not be exceeded under any circumstances.

CHARACTERISTIC PERFORMANCE DATA

	N2 produced in Nm ³ /h at 7.0 barg; 25°C in scfm at 102.0 psig; 77°F ²	Air / N2 ratio
99%	19.1 11.9	3.7
98%	27.2 17.0	2.9
97%	34.7 21.7	2.5
96%	42.3 26.5	2.3
95%	50.4 31.5	2.1

The composition of the product was determined by measurement of the residual oxygen content. The “N2 produced” value is the inert gas content. The pressure is the retentate pressure, namely N2 produced stream discharge pressure. The inlet air divided by “N2 produced” gives the air factor or air/N2 ratio. The lower the air factor, the lower the investment and operating costs.

CAUTION

Nitrogen gas is colorless, odorless and nonflammable. It is non-toxic but may cause asphyxiation by displacement of oxygen. Ensure proper ventilation. Oxygen is a colorless, odorless and oxidizing gas. It is non-toxic, but at high concentrations in the atmosphere it accelerates combustion and increases the risk of fire and explosion of combustible or flammable materials.

OPERATION

The proper operation of **SEPURAN® N2** systems is described in the associated user manual.

PRODUCT CODE	PRODUCT NAME
99142104	SEPURAN® – N2Sys 150x1310 P1.5G 6 16EN

² Norm = 0°C, 1 atm | 32°F, 1 atm;
Standard = 15.5°C, 1 atm | 60°F, 1 atm

Disclaimer

This information and any recommendations, technical or otherwise, are presented in good faith and believed to be correct as of the date prepared. Recipients of this information and recommendations must make their own determination as to its suitability for their purposes. In no event shall Evonik assume liability for damages or losses of any kind or nature that result from the use of or reliance upon this information and recommendations. EVONIK EXPRESSLY DISCLAIMS ANY REPRESENTATIONS AND WARRANTIES OF ANY KIND, WHETHER EXPRESS OR IMPLIED, AS TO THE ACCURACY, COMPLETENESS, NON-INFRINGEMENT, MERCHANTABILITY AND/OR FITNESS FOR A PARTICULAR PURPOSE (EVEN IF EVONIK IS AWARE OF SUCH PURPOSE) WITH RESPECT TO ANY INFORMATION AND RECOMMENDATIONS PROVIDED. Reference to any trade names used by other companies is neither a recommendation nor an endorsement of the corresponding product, and does not imply that similar products could not be used. Evonik reserves the right to make any changes to the information and/or recommendations at any time, without prior or subsequent notice.

Evonik Fibres GmbH
Gewerbepark 4
4861 Schörfling/Austria

Phone +43 7662 6006-0
sepuran@evonik.com
www.evonik.com/sepuran
www.membrane-separation.com

Technical Information

SEPURAN® N₂ System

SEPURAN® – N2Sys 150x1310 P1.5G 6 16AS




SEPURAN® N₂ system (sample picture)

Associated documents:

- User manual SEPURAN® N₂ system
- Technical drawing

SEPURAN® N₂ is a hollow fiber membrane gas separator that is used to remove oxygen from compressed air, resulting in N₂ purities between 95–99.5%. The polymer is specially tailored for nitrogen generation. Unlike other gas separation membranes, SEPURAN® N₂ membranes are characterized by a very high flow capacity with a very good air factor, resulting in the optimization of compression and operating cost.

DIMENSIONS

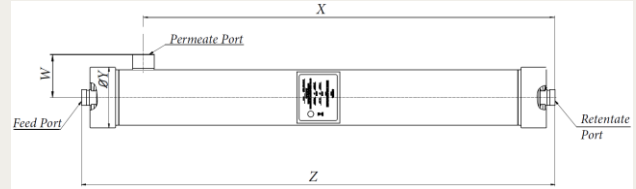

Permeate port – W	136 mm 5.35 inch
Permeate port – X	1 259 mm 49.57 inch
Max diameter – Y	184 mm 7.24 inch
Total length – Z	1 448 mm 57.01 inch
Feed / Retentate connection	BSPP–Thread 1" and Victaulic 1½"
Permeate connection	BSPP–Thread 1½" and Victaulic 2"
Weight	38.3 kg 84.4 lbs
Drawing number	EVK–Hsg 6N–1 1.5–1.0G 6 25AS–C–V01–A

For more specific dimensions of the system, please use the corresponding technical drawing.

SPECIFICATIONS

Design, manufacturing and testing acc. to	ASME / CRN
External material housing	SS 316 – 1.4404
External material cartridge tube	Aluminium
Operating pressure Feed- / Retentate side	≤ 16.0 barg ≤ 232.0 psig
Operating pressure Permeate side	≥ 0.0 barg ≥ 0.0 psig
Transmembrane pressure¹	≤ 16.0 bar ≤ 232.0 psi
Max. actual permeate flow rate	≤ 200 Am ³ /h ≤ 117.8 acfm
To be used with	Pre-treated pressurized air
Other Gases	Contact the supplier
Permitted temperature range	1 – 70°C 34 – 158°F
Inlet air requirements	Particles, aerosols: ISO 8573-1:2010 class [1:-:1] Condensation of water must be avoided

¹The specified transmembrane pressure (TMP) must not be exceeded under any circumstances.

CHARACTERISTIC PERFORMANCE DATA

	N2 produced in Nm ³ /h at 7.0 barg; 25°C in scfm at 102.0 psig; 77°F ²	Air / N2 ratio
99%	19.1 11.9	3.7
98%	27.2 17.0	2.9
97%	34.7 21.7	2.5
96%	42.3 26.5	2.3
95%	50.4 31.5	2.1

The composition of the product was determined by measurement of the residual oxygen content. The “N2 produced” value is the inert gas content. The pressure is the retentate pressure, namely N2 produced stream discharge pressure. The inlet air divided by “N2 produced” gives the air factor or air/N2 ratio. The lower the air factor, the lower the investment and operating costs.

CAUTION

Nitrogen gas is colorless, odorless and nonflammable. It is non-toxic but may cause asphyxiation by displacement of oxygen. Ensure proper ventilation. Oxygen is a colorless, odorless and oxidizing gas. It is non-toxic, but at high concentrations in the atmosphere it accelerates combustion and increases the risk of fire and explosion of combustible or flammable materials.

OPERATION

The proper operation of **SEPURAN® N2** systems is described in the associated user manual.

PRODUCT CODE	PRODUCT NAME
99141882	SEPURAN® – N2Sys 150x1310 P1.5G 6 16AS

² Norm = 0°C, 1 atm | 32°F, 1 atm;
Standard = 15.5°C, 1 atm | 60°F, 1 atm

Disclaimer

This information and any recommendations, technical or otherwise, are presented in good faith and believed to be correct as of the date prepared. Recipients of this information and recommendations must make their own determination as to its suitability for their purposes. In no event shall Evonik assume liability for damages or losses of any kind or nature that result from the use of or reliance upon this information and recommendations. EVONIK EXPRESSLY DISCLAIMS ANY REPRESENTATIONS AND WARRANTIES OF ANY KIND, WHETHER EXPRESS OR IMPLIED, AS TO THE ACCURACY, COMPLETENESS, NON-INFRINGEMENT, MERCHANTABILITY AND/OR FITNESS FOR A PARTICULAR PURPOSE (EVEN IF EVONIK IS AWARE OF SUCH PURPOSE) WITH RESPECT TO ANY INFORMATION AND RECOMMENDATIONS PROVIDED. Reference to any trade names used by other companies is neither a recommendation nor an endorsement of the corresponding product, and does not imply that similar products could not be used. Evonik reserves the right to make any changes to the information and/or recommendations at any time, without prior or subsequent notice.

Evonik Fibres GmbH
Gewerbepark 4
4861 Schörfling/Austria

Phone +43 7662 6006-0
sepuran@evonik.com
www.evonik.com/sepuran
www.membrane-separation.com

Technical Information

SEPURAN® N₂ System

SEPURAN® – N2Sys 150x1310 P2.0N 6 16AE




SEPURAN® N₂ system (sample picture)

Associated documents:

- User manual SEPURAN® N₂ system
- Technical drawing

SEPURAN® N₂ is a hollow fiber membrane gas separator that is used to remove oxygen from compressed air, resulting in N₂ purities between 95–99.5%. The polymer is specially tailored for nitrogen generation. Unlike other gas separation membranes, SEPURAN® N₂ membranes are characterized by a very high flow capacity with a very good air factor, resulting in the optimization of compression and operating cost.

DIMENSIONS

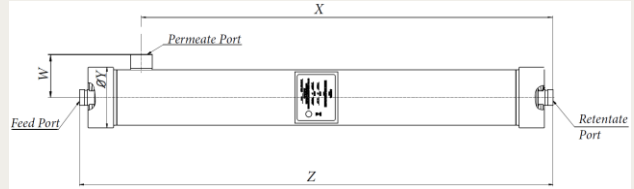

Permeate port – W	131 mm 5.16 inch
Permeate port – X	1 259 mm 49.57 inch
Max diameter – Y	184 mm 7.24 inch
Total length – Z	1 448 mm 57.01 inch
Feed / Retentate connection	NPT–Thread 1" and Victaulic 1½"
Permeate connection	NPT–Thread 2"
Weight	39.3 kg 86.6 lbs
Drawing number	EVK–Hsg 6N–1 2.0–1.0N 6 25AE–C–V01–A

For more specific dimensions of the system, please use the corresponding technical drawing.

SPECIFICATIONS

Design, manufacturing and testing acc. to	EN / ASME / CRN
External material housing	SS 316 – 1.4404
External material cartridge tube	Aluminium
Operating pressure Feed- / Retentate side	≤ 16.0 barg ≤ 232.0 psig
Operating pressure Permeate side	≥ 0.0 barg ≥ 0.0 psig
Transmembrane pressure¹	≤ 16.0 bar ≤ 232.0 psi
Max. actual permeate flow rate	≤ 200 Am ³ /h ≤ 117.8 acfm
To be used with	Pre-treated pressurized air
Other Gases	Contact the supplier
Permitted temperature range	1 – 70°C 34 – 158°F
Inlet air requirements	Particles, aerosols: ISO 8573-1:2010 class [1:-:1]
	Condensation of water must be avoided

¹The specified transmembrane pressure (TMP) must not be exceeded under any circumstances.

CHARACTERISTIC PERFORMANCE DATA

	N2 produced in Nm ³ /h at 7.0 barg; 25°C in scfm at 102.0 psig; 77°F ²	Air / N2 ratio
99%	19.1 11.9	3.7
98%	27.2 17.0	2.9
97%	34.7 21.7	2.5
96%	42.3 26.5	2.3
95%	50.4 31.5	2.1

The composition of the product was determined by measurement of the residual oxygen content. The “N2 produced” value is the inert gas content. The pressure is the retentate pressure, namely N2 produced stream discharge pressure. The inlet air divided by “N2 produced” gives the air factor or air/N2 ratio. The lower the air factor, the lower the investment and operating costs.

CAUTION

Nitrogen gas is colorless, odorless and nonflammable. It is non-toxic but may cause asphyxiation by displacement of oxygen. Ensure proper ventilation. Oxygen is a colorless, odorless and oxidizing gas. It is non-toxic, but at high concentrations in the atmosphere it accelerates combustion and increases the risk of fire and explosion of combustible or flammable materials.

OPERATION

The proper operation of **SEPURAN® N2** systems is described in the associated user manual.

PRODUCT CODE	PRODUCT NAME
99133946	SEPURAN® – N2Sys 150x1310 P2.0N 6 16AE

² Norm = 0°C, 1 atm | 32°F, 1 atm;
Standard = 15.5°C, 1 atm | 60°F, 1 atm

Disclaimer

This information and any recommendations, technical or otherwise, are presented in good faith and believed to be correct as of the date prepared. Recipients of this information and recommendations must make their own determination as to its suitability for their purposes. In no event shall Evonik assume liability for damages or losses of any kind or nature that result from the use of or reliance upon this information and recommendations. EVONIK EXPRESSLY DISCLAIMS ANY REPRESENTATIONS AND WARRANTIES OF ANY KIND, WHETHER EXPRESS OR IMPLIED, AS TO THE ACCURACY, COMPLETENESS, NON-INFRINGEMENT, MERCHANTABILITY AND/OR FITNESS FOR A PARTICULAR PURPOSE (EVEN IF EVONIK IS AWARE OF SUCH PURPOSE) WITH RESPECT TO ANY INFORMATION AND RECOMMENDATIONS PROVIDED. Reference to any trade names used by other companies is neither a recommendation nor an endorsement of the corresponding product, and does not imply that similar products could not be used. Evonik reserves the right to make any changes to the information and/or recommendations at any time, without prior or subsequent notice.

Evonik Fibres GmbH
Gewerbepark 4
4861 Schörfling/Austria

Phone +43 7662 6006-0
sepuran@evonik.com
www.evonik.com/sepuran
www.membrane-separation.com

Technical Information

SEPURAN® N₂ System

SEPURAN® – N2Sys 150x1310 P2.0N 6 16CN




SEPURAN® N₂ system (sample picture)

Associated documents:

- User manual SEPURAN® N₂ system
- Technical drawing

SEPURAN® N₂ is a hollow fiber membrane gas separator that is used to remove oxygen from compressed air, resulting in N₂ purities between 95–99.5%. The polymer is specially tailored for nitrogen generation. Unlike other gas separation membranes, **SEPURAN® N₂** membranes are characterized by a very high flow capacity with a very good air factor, resulting in the optimization of compression and operating cost.

DIMENSIONS

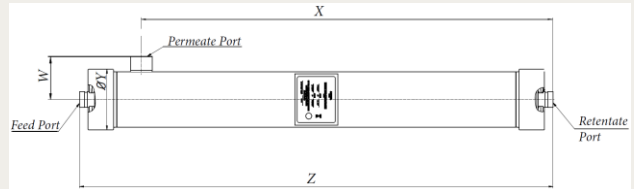

Permeate port – W	131 mm 5.16 inch
Permeate port – X	1 259 mm 49.57 inch
Max diameter – Y	184 mm 7.24 inch
Total length – Z	1 448 mm 57.01 inch
Feed / Retentate connection	NPT–Thread 1" and Victaulic 1½"
Permeate connection	NPT–Thread 2"
Weight	39.3 kg 86.6 lbs
Drawing number	EVK–Hsg 6N–1 2.0–1.0N 6 25CN–C–V01–A

For more specific dimensions of the system, please use the corresponding technical drawing.

SPECIFICATIONS

Design, manufacturing and testing acc. to	SELO
External material housing	SS 316 – 1.4404
External material cartridge tube	Aluminium
Operating pressure Feed- / Retentate side	≤ 16.0 barg ≤ 232.0 psig
Operating pressure Permeate side	≥ 0.0 barg ≥ 0.0 psig
Transmembrane pressure¹	≤ 16.0 bar ≤ 232.0 psi
Max. actual permeate flow rate	≤ 200 Am ³ /h ≤ 117.8 acfm
To be used with	Pre-treated pressurized air
Other Gases	Contact the supplier
Permitted temperature range	1 – 70°C 34 – 158°F
Inlet air requirements	Particles, aerosols: ISO 8573-1:2010 class [1:-:1] Condensation of water must be avoided

¹The specified transmembrane pressure (TMP) must not be exceeded under any circumstances.

CHARACTERISTIC PERFORMANCE DATA

	N2 produced in Nm ³ /h at 7.0 barg; 25°C in scfm at 102.0 psig; 77°F ²	Air / N2 ratio
99%	19.1 11.9	3.7
98%	27.2 17.0	2.9
97%	34.7 21.7	2.5
96%	42.3 26.5	2.3
95%	50.4 31.5	2.1

The composition of the product was determined by measurement of the residual oxygen content. The “N2 produced” value is the inert gas content. The pressure is the retentate pressure, namely N2 produced stream discharge pressure. The inlet air divided by “N2 produced” gives the air factor or air/N2 ratio. The lower the air factor, the lower the investment and operating costs.

CAUTION

Nitrogen gas is colorless, odorless and nonflammable. It is non-toxic but may cause asphyxiation by displacement of oxygen. Ensure proper ventilation. Oxygen is a colorless, odorless and oxidizing gas. It is non-toxic, but at high concentrations in the atmosphere it accelerates combustion and increases the risk of fire and explosion of combustible or flammable materials.

OPERATION

The proper operation of **SEPURAN® N2** systems is described in the associated user manual.

PRODUCT CODE	PRODUCT NAME
99141774	SEPURAN® – N2Sys 150x1310 P2.0N 6 16CN

² Norm = 0°C, 1 atm | 32°F, 1 atm;
Standard = 15.5°C, 1 atm | 60°F, 1 atm

Disclaimer

This information and any recommendations, technical or otherwise, are presented in good faith and believed to be correct as of the date prepared. Recipients of this information and recommendations must make their own determination as to its suitability for their purposes. In no event shall Evonik assume liability for damages or losses of any kind or nature that result from the use of or reliance upon this information and recommendations. EVONIK EXPRESSLY DISCLAIMS ANY REPRESENTATIONS AND WARRANTIES OF ANY KIND, WHETHER EXPRESS OR IMPLIED, AS TO THE ACCURACY, COMPLETENESS, NON-INFRINGEMENT, MERCHANTABILITY AND/OR FITNESS FOR A PARTICULAR PURPOSE (EVEN IF EVONIK IS AWARE OF SUCH PURPOSE) WITH RESPECT TO ANY INFORMATION AND RECOMMENDATIONS PROVIDED. Reference to any trade names used by other companies is neither a recommendation nor an endorsement of the corresponding product, and does not imply that similar products could not be used. Evonik reserves the right to make any changes to the information and/or recommendations at any time, without prior or subsequent notice.

Evonik Fibres GmbH
Gewerbepark 4
4861 Schörfling/Austria

Phone +43 7662 6006-0
sepuran@evonik.com
www.evonik.com/sepuran
www.membrane-separation.com

Technical Information

SEPURAN® N₂ System

SEPURAN® – N2Sys 150x1310 P2.0N 6 25AE




SEPURAN® N₂ system (sample picture)

Associated documents:

- User manual SEPURAN® N₂ system
- Technical drawing

SEPURAN® N₂ is a hollow fiber membrane gas separator that is used to remove oxygen from compressed air, resulting in N₂ purities between 95–99.5%. The polymer is specially tailored for nitrogen generation. Unlike other gas separation membranes, SEPURAN® N₂ membranes are characterized by a very high flow capacity with a very good air factor, resulting in the optimization of compression and operating cost.

DIMENSIONS

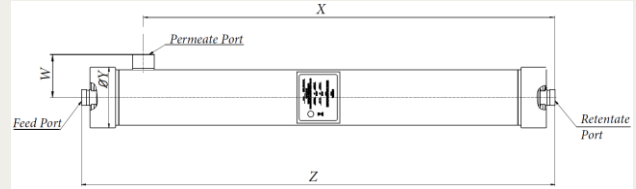

Permeate port – W	131 mm 5.16 inch
Permeate port – X	1 259 mm 49.57 inch
Max diameter – Y	184 mm 7.24 inch
Total length – Z	1 448 mm 57.01 inch
Feed / Retentate connection	NPT–Thread 1" and Victaulic 1½"
Permeate connection	NPT–Thread 2"
Weight	39.3 kg 86.6 lbs
Drawing number	EVK–Hsg 6N–1 2.0–1.0N 6 25AE–C–V01–A

For more specific dimensions of the system, please use the corresponding technical drawing.

SPECIFICATIONS

Design, manufacturing and testing acc. to	EN / ASME / CRN
External material housing	SS 316 – 1.4404
External material cartridge tube	Aluminium
Operating pressure Feed- / Retentate side	≤ 25.0 barg ≤ 362.6 psig
Operating pressure Permeate side	≥ 0.0 barg ≥ 0.0 psig
Transmembrane pressure¹	≤ 25.0 bar ≤ 362.6 psi
Max. actual permeate flow rate	≤ 200 Am ³ /h ≤ 117.8 acfm
To be used with	Pre-treated pressurized air
Other Gases	Contact the supplier
Permitted temperature range	1 – 70°C 34 – 158°F
Inlet air requirements	Particles, aerosols: ISO 8573-1:2010 class [1:-:1] Condensation of water must be avoided

¹The specified transmembrane pressure (TMP) must not be exceeded under any circumstances.

CHARACTERISTIC PERFORMANCE DATA

	N2 produced in Nm ³ /h at 7.0 barg; 25°C in scfm at 102.0 psig; 77°F ²	Air / N2 ratio
99%	19.1 11.9	3.7
98%	27.2 17.0	2.9
97%	34.7 21.7	2.5
96%	42.3 26.5	2.3
95%	50.4 31.5	2.1

The composition of the product was determined by measurement of the residual oxygen content. The “N2 produced” value is the inert gas content. The pressure is the retentate pressure, namely N2 produced stream discharge pressure. The inlet air divided by “N2 produced” gives the air factor or air/N2 ratio. The lower the air factor, the lower the investment and operating costs.

CAUTION

Nitrogen gas is colorless, odorless and nonflammable. It is non-toxic but may cause asphyxiation by displacement of oxygen. Ensure proper ventilation. Oxygen is a colorless, odorless and oxidizing gas. It is non-toxic, but at high concentrations in the atmosphere it accelerates combustion and increases the risk of fire and explosion of combustible or flammable materials.

OPERATION

The proper operation of **SEPURAN® N2** systems is described in the associated user manual.

PRODUCT CODE	PRODUCT NAME
99111367	SEPURAN® – N2Sys 150x1310 P2.0N 6 25AE

² Norm = 0°C, 1 atm | 32°F, 1 atm;
Standard = 15.5°C, 1 atm | 60°F, 1 atm

Disclaimer

This information and any recommendations, technical or otherwise, are presented in good faith and believed to be correct as of the date prepared. Recipients of this information and recommendations must make their own determination as to its suitability for their purposes. In no event shall Evonik assume liability for damages or losses of any kind or nature that result from the use of or reliance upon this information and recommendations. EVONIK EXPRESSLY DISCLAIMS ANY REPRESENTATIONS AND WARRANTIES OF ANY KIND, WHETHER EXPRESS OR IMPLIED, AS TO THE ACCURACY, COMPLETENESS, NON-INFRINGEMENT, MERCHANTABILITY AND/OR FITNESS FOR A PARTICULAR PURPOSE (EVEN IF EVONIK IS AWARE OF SUCH PURPOSE) WITH RESPECT TO ANY INFORMATION AND RECOMMENDATIONS PROVIDED. Reference to any trade names used by other companies is neither a recommendation nor an endorsement of the corresponding product, and does not imply that similar products could not be used. Evonik reserves the right to make any changes to the information and/or recommendations at any time, without prior or subsequent notice.

Evonik Fibres GmbH
Gewerbepark 4
4861 Schörfling/Austria

Phone +43 7662 6006-0
sepuran@evonik.com
www.evonik.com/sepuran
www.membrane-separation.com

Technical Information

SEPURAN® N₂ System

SEPURAN® – N2Sys 150x1310 P2.0N 6 25CN




SEPURAN® N₂ system (sample picture)

Associated documents:

- User manual SEPURAN® N₂ system
- Technical drawing

SEPURAN® N₂ is a hollow fiber membrane gas separator that is used to remove oxygen from compressed air, resulting in N₂ purities between 95–99.5%. The polymer is specially tailored for nitrogen generation. Unlike other gas separation membranes, **SEPURAN® N₂** membranes are characterized by a very high flow capacity with a very good air factor, resulting in the optimization of compression and operating cost.

DIMENSIONS

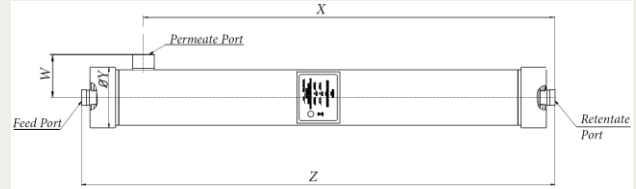

Permeate port – W	131 mm 5.16 inch
Permeate port – X	1 259 mm 49.57 inch
Max diameter – Y	184 mm 7.24 inch
Total length – Z	1 448 mm 57.01 inch
Feed / Retentate connection	NPT–Thread 1" and Victaulic 1½"
Permeate connection	NPT–Thread 2"
Weight	39.3 kg 86.6 lbs
Drawing number	EVK–Hsg 6N–1 2.0–1.0N 6 25CN–C–V01–A

For more specific dimensions of the system, please use the corresponding technical drawing.

SPECIFICATIONS

Design, manufacturing and testing acc. to	SELO
External material housing	SS 316 – 1.4404
External material cartridge tube	Aluminium
Operating pressure Feed- / Retentate side	≤ 25.0 barg ≤ 362.6 psig
Operating pressure Permeate side	≥ 0.0 barg ≥ 0.0 psig
Transmembrane pressure¹	≤ 25.0 bar ≤ 362.6 psi
Max. actual permeate flow rate	≤ 200 Am ³ /h ≤ 117.8 acfm
To be used with	Pre-treated pressurized air
Other Gases	Contact the supplier
Permitted temperature range	1 – 70°C 34 – 158°F
Inlet air requirements	Particles, aerosols: ISO 8573-1:2010 class [1:-:1] Condensation of water must be avoided

¹The specified transmembrane pressure (TMP) must not be exceeded under any circumstances.

CHARACTERISTIC PERFORMANCE DATA

	N2 produced in Nm ³ /h at 7.0 barg; 25°C in scfm at 102.0 psig; 77°F ²	Air / N2 ratio
99%	19.1 11.9	3.7
98%	27.2 17.0	2.9
97%	34.7 21.7	2.5
96%	42.3 26.5	2.3
95%	50.4 31.5	2.1

The composition of the product was determined by measurement of the residual oxygen content. The “N2 produced” value is the inert gas content. The pressure is the retentate pressure, namely N2 produced stream discharge pressure. The inlet air divided by “N2 produced” gives the air factor or air/N2 ratio. The lower the air factor, the lower the investment and operating costs.

CAUTION

Nitrogen gas is colorless, odorless and nonflammable. It is non-toxic but may cause asphyxiation by displacement of oxygen. Ensure proper ventilation. Oxygen is a colorless, odorless and oxidizing gas. It is non-toxic, but at high concentrations in the atmosphere it accelerates combustion and increases the risk of fire and explosion of combustible or flammable materials.

OPERATION

The proper operation of **SEPURAN® N2** systems is described in the associated user manual.

PRODUCT CODE	PRODUCT NAME
99122991	SEPURAN® – N2Sys 150x1310 P2.0N 6 25CN

² Norm = 0°C, 1 atm | 32°F, 1 atm;
Standard = 15.5°C, 1 atm | 60°F, 1 atm

Disclaimer

This information and any recommendations, technical or otherwise, are presented in good faith and believed to be correct as of the date prepared. Recipients of this information and recommendations must make their own determination as to its suitability for their purposes. In no event shall Evonik assume liability for damages or losses of any kind or nature that result from the use of or reliance upon this information and recommendations. EVONIK EXPRESSLY DISCLAIMS ANY REPRESENTATIONS AND WARRANTIES OF ANY KIND, WHETHER EXPRESS OR IMPLIED, AS TO THE ACCURACY, COMPLETENESS, NON-INFRINGEMENT, MERCHANTABILITY AND/OR FITNESS FOR A PARTICULAR PURPOSE (EVEN IF EVONIK IS AWARE OF SUCH PURPOSE) WITH RESPECT TO ANY INFORMATION AND RECOMMENDATIONS PROVIDED. Reference to any trade names used by other companies is neither a recommendation nor an endorsement of the corresponding product, and does not imply that similar products could not be used. Evonik reserves the right to make any changes to the information and/or recommendations at any time, without prior or subsequent notice.

Evonik Fibres GmbH
Gewerbepark 4
4861 Schörfling/Austria

Phone +43 7662 6006-0
sepuran@evonik.com
www.evonik.com/sepuran
www.membrane-separation.com

Technical Information

SEPURAN® N₂ System

SEPURAN® – N2Sys 150x1310 P1.5F 6 25EN




SEPURAN® N₂ system (sample picture)

Associated documents:

- User manual SEPURAN® N₂ system
- Technical drawing

SEPURAN® N₂ is a hollow fiber membrane gas separator that is used to remove oxygen from compressed air, resulting in N₂ purities between 95–99.5%. The polymer is specially tailored for nitrogen generation. Unlike other gas separation membranes, **SEPURAN® N₂** membranes are characterized by a very high flow capacity with a very good air factor, resulting in the optimization of compression and operating cost.

DIMENSIONS

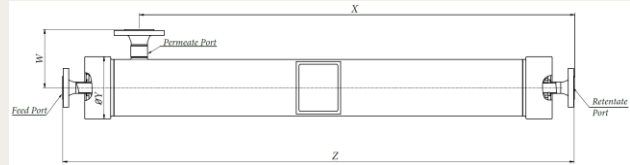

Permeate port – W	173 mm 6.81 inch
Permeate port – X	1 299 mm 51.14 inch
Max diameter – Y	184 mm 7.24 inch
Total length – Z	1 528 mm 60.16 inch
Feed / Retentate connection	Flange DIN EN 1092–1 Type 11 – B1 – PN40 – DN25
Permeate connection	Flange DIN EN 1092–1 Type 11 – B1 – PN40 – DN40
Weight	42.8 kg 94.4 lbs
Drawing number	EVK–Hsg 6N–1 1.5–1.0F 6 25EN–C–V01–B

For more specific dimensions of the system, please use the corresponding technical drawing.

SPECIFICATIONS

Design, manufacturing and testing acc. to	EN
External material housing	SS 316 – 1.4404
External material cartridge tube	Aluminium
Operating pressure Feed- / Retentate side	≤ 25.0 barg ≤ 362.6 psig
Operating pressure Permeate side	≥ 0.0 barg ≥ 0.0 psig
Transmembrane pressure ¹	≤ 25.0 bar ≤ 362.6 psi
Max. actual permeate flow rate	≤ 200 Am ³ /h ≤ 117.8 acfm
To be used with	Pre-treated pressurized air
Other Gases	Contact the supplier
Permitted temperature range	1 – 70°C 34 – 158°F
Inlet air requirements	Particles, aerosols: ISO 8573-1:2010 class [1:-:1]
	Condensation of water must be avoided

¹The specified transmembrane pressure (TMP) must not be exceeded under any circumstances.

CHARACTERISTIC PERFORMANCE DATA

	N ₂ produced in Nm ³ /h at 7.0 barg; 25°C in scfm at 102.0 psig; 77°F ²	Air / N ₂ ratio
99%	19.1 11.9	3.7
98%	27.2 17.0	2.9
97%	34.7 21.7	2.5
96%	42.3 26.5	2.3
95%	50.4 31.5	2.1

The composition of the product was determined by measurement of the residual oxygen content. The “N₂ produced” value is the inert gas content. The pressure is the retentate pressure, namely N₂ produced stream discharge pressure. The inlet air divided by “N₂ produced” gives the air factor or air/N₂ ratio. The lower the air factor, the lower the investment and operating costs.

CAUTION

Nitrogen gas is colorless, odorless and nonflammable. It is non-toxic but may cause asphyxiation by displacement of oxygen. Ensure proper ventilation. Oxygen is a colorless, odorless and oxidizing gas. It is non-toxic, but at high concentrations in the atmosphere it accelerates combustion and increases the risk of fire and explosion of combustible or flammable materials.

OPERATION

The proper operation of **SEPURAN® N₂** systems is described in the associated user manual.

PRODUCT CODE	PRODUCT NAME
99142729	SEPURAN® – N ₂ Sys 150x1310 P1.5F 6 25EN

² Norm = 0°C, 1 atm | 32°F, 1 atm;
Standard = 15.5°C, 1 atm | 60°F, 1 atm

Disclaimer

This information and any recommendations, technical or otherwise, are presented in good faith and believed to be correct as of the date prepared. Recipients of this information and recommendations must make their own determination as to its suitability for their purposes. In no event shall Evonik assume liability for damages or losses of any kind or nature that result from the use of or reliance upon this information and recommendations. EVONIK EXPRESSLY DISCLAIMS ANY REPRESENTATIONS AND WARRANTIES OF ANY KIND, WHETHER EXPRESS OR IMPLIED, AS TO THE ACCURACY, COMPLETENESS, NON-INFRINGEMENT, MERCHANTABILITY AND/OR FITNESS FOR A PARTICULAR PURPOSE (EVEN IF EVONIK IS AWARE OF SUCH PURPOSE) WITH RESPECT TO ANY INFORMATION AND RECOMMENDATIONS PROVIDED. Reference to any trade names used by other companies is neither a recommendation nor an endorsement of the corresponding product, and does not imply that similar products could not be used. Evonik reserves the right to make any changes to the information and/or recommendations at any time, without prior or subsequent notice.

Evonik Fibres GmbH
Gewerbepark 4
4861 Schörfling/Austria

Phone +43 7662 6006-0
sepuran@evonik.com
www.evonik.com/sepuran
www.membrane-separation.com

Technical Information

SEPURAN® N₂ System

SEPURAN® – N2Sys 150x1310 P1.5F 6 25AS




SEPURAN® N₂ system (sample picture)

Associated documents:

- User manual SEPURAN® N₂ system
- Technical drawing

SEPURAN® N₂ is a hollow fiber membrane gas separator that is used to remove oxygen from compressed air, resulting in N₂ purities between 95–99.5%. The polymer is specially tailored for nitrogen generation. Unlike other gas separation membranes, SEPURAN® N₂ membranes are characterized by a very high flow capacity with a very good air factor, resulting in the optimization of compression and operating cost.

DIMENSIONS

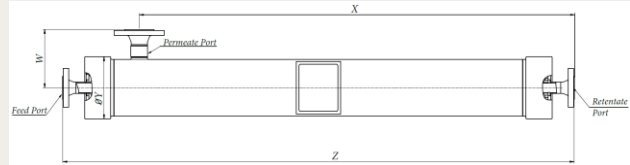

Permeate port – W	197 mm 7.76 inch
Permeate port – X	1 321 mm 52.01 inch
Max diameter – Y	184 mm 7.24 inch
Total length – Z	1 572 mm 61.89 inch
Feed / Retentate connection	Flange ASME B16.5 – WN-RF – 300lbs – 1"
Permeate connection	Flange ASME B16.5 – WN-RF – 300lbs – 1½"
Weight	44.3 kg 97.7 lbs
Drawing number	EVK-Hsg 6N-1 1.5-1.0F 6 25AS-C-V01-B

For more specific dimensions of the system, please use the corresponding technical drawing.

SPECIFICATIONS

Design, manufacturing and testing acc. to	ASME
External material housing	SS 316 – 1.4404
External material cartridge tube	Aluminium
Operating pressure Feed- / Retentate side	≤ 25.0 barg ≤ 362.6 psig
Operating pressure Permeate side	≥ 0.0 barg ≥ 0.0 psig
Transmembrane pressure ¹	≤ 25.0 bar ≤ 362.6 psi
Max. actual permeate flow rate	≤ 200 Am ³ /h ≤ 117.8 acfm
To be used with	Pre-treated pressurized air
Other Gases	Contact the supplier
Permitted temperature range	1 – 70°C 34 – 158°F
Inlet air requirements	Particles, aerosols: ISO 8573-1:2010 class [1:-:1]
	Condensation of water must be avoided

¹The specified transmembrane pressure (TMP) must not be exceeded under any circumstances.

CHARACTERISTIC PERFORMANCE DATA

	N ₂ produced in Nm ³ /h at 7.0 barg; 25°C in scfm at 102.0 psig; 77°F ²	Air / N ₂ ratio
99%	19.1 11.9	3.7
98%	27.2 17.0	2.9
97%	34.7 21.7	2.5
96%	42.3 26.5	2.3
95%	50.4 31.5	2.1

The composition of the product was determined by measurement of the residual oxygen content. The “N₂ produced” value is the inert gas content. The pressure is the retentate pressure, namely N₂ produced stream discharge pressure. The inlet air divided by “N₂ produced” gives the air factor or air/N₂ ratio. The lower the air factor, the lower the investment and operating costs.

CAUTION

Nitrogen gas is colorless, odorless and nonflammable. It is non-toxic but may cause asphyxiation by displacement of oxygen. Ensure proper ventilation. Oxygen is a colorless, odorless and oxidizing gas. It is non-toxic, but at high concentrations in the atmosphere it accelerates combustion and increases the risk of fire and explosion of combustible or flammable materials.

OPERATION

The proper operation of **SEPURAN® N₂** systems is described in the associated user manual.

PRODUCT CODE	PRODUCT NAME
99142727	SEPURAN® – N ₂ Sys 150x1310 P1.5F 6 25AS

² Norm = 0°C, 1 atm | 32°F, 1 atm;
Standard = 15.5°C, 1 atm | 60°F, 1 atm

Disclaimer

This information and any recommendations, technical or otherwise, are presented in good faith and believed to be correct as of the date prepared. Recipients of this information and recommendations must make their own determination as to its suitability for their purposes. In no event shall Evonik assume liability for damages or losses of any kind or nature that result from the use of or reliance upon this information and recommendations. EVONIK EXPRESSLY DISCLAIMS ANY REPRESENTATIONS AND WARRANTIES OF ANY KIND, WHETHER EXPRESS OR IMPLIED, AS TO THE ACCURACY, COMPLETENESS, NON-INFRINGEMENT, MERCHANTABILITY AND/OR FITNESS FOR A PARTICULAR PURPOSE (EVEN IF EVONIK IS AWARE OF SUCH PURPOSE) WITH RESPECT TO ANY INFORMATION AND RECOMMENDATIONS PROVIDED. Reference to any trade names used by other companies is neither a recommendation nor an endorsement of the corresponding product, and does not imply that similar products could not be used. Evonik reserves the right to make any changes to the information and/or recommendations at any time, without prior or subsequent notice.

Evonik Fibres GmbH

Gewerbepark 4
4861 Schörfling/Austria

Phone +43 7662 6006-0
sepuran@evonik.com
www.evonik.com/sepuran
www.membrane-separation.com