#### **Evonik Corporation**

Business Line Crosslinkers 299 Jefferson Road Parsippany, NJ 07054 USA

PHONE +1 973 929-8000 FAX +1 973 929-8460 vesta@evonik.com

www.evonik.com/crosslinkers

#### **Evonik Speciality Chemicals Co., Ltd.**

Business Line Crosslinkers 55, Chundong Road Xinzhuang Industry Park Shanghai, 201108 PR China

PHONE +86 21 6119-1000 FAX +86 21 6119-1168 vesta@evonik.com


www.evonik.cn/crosslinkers

VESTANAT® is a registered trademark of Evonik Industries or one of its subsidiaries.

This information and all further technical advice are based on our present knowledge and experience. However, it implies no liability or other legal responsibility on our part, including with regard to existing third party intellectual property rights, especially patent rights. In particular, no warranty, whether express or implied, or guarantee of product properties in the legal sense is intended or implied. We reserve the right to make any changes according to technological progress or further developments. The customer is not released from the obligation to conduct careful inspection and testing of incoming goods. Performance of the product described herein should be verified by testing, which should be carried out only by qualified experts in the sole responsibility of a customer. Reference to trade names used by other companies is neither a recommendation, nor does it imply that similar products

could not be used.



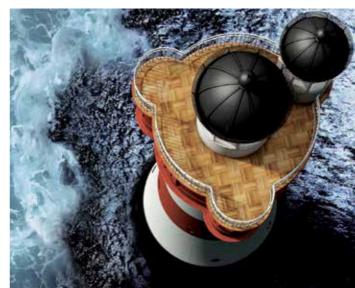

# **VESTANAT®**

PUR crosslinkers for liquid coating applications

VESTA – Developed in Germany. Available globally.

EVONIK







#### **Evonik Resource Efficiency GmbH**

Business Line Crosslinkers Paul-Baumann-Straße 1 45764 Marl Germany

PHONE +49 2365 49-9011 FAX +49 2365 49-5030 vesta@evonik.com

www.evonik.com/crosslinkers

More information




Evonik. Power to create. Evonik. Power to create.



## **About us**

For more than 50 years Evonik's Business Line Crosslinkers has been the reliable partner and solution provider in the field of isophorone chemistry. With global production sites, we are uniquely placed to satisfy our customers' demands. Our portfolio of VESTA products showcases high performance materials that enhance the quality of our customers' applications.

VESTA - Developed in Germany. Available globally.

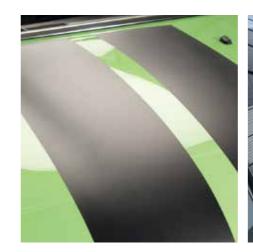







VESTANAT® products are a natural fit for high performance PUR coatings.


With its highly specialized product portfolio and broad expertise in crosslinker technology, Evonik is a major and essential provider of new solutions for liquid coating systems. Our strong competitive position is based on integrated technology platforms, innovation power and close cooperation with our customers.

# Benefits at a glance

- Versatile product range
- Excellence in quality
- Securing reliability for coating formulations
- Global technical service and R&D

# Crosslinking makes the difference...

In a well-linked network, by connecting many individuals, a continuously stable performance can be assured and often even the positive extra can be achieved. The idea of crosslinking can be applied in the field of coating systems. Single molecules have the potential to perform outstandingly, but crosslinked molecules surpass the level of superior performance.

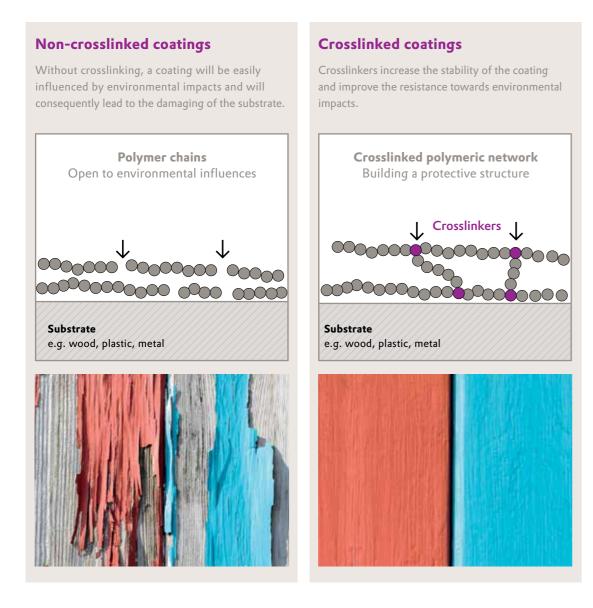

Based on a broad isophorone technology platform Evonik offers VESTANAT® crosslinking solutions that ensure the excellence of coatings.



#### **VESTANAT®**

## Crosslinkers for high-performance PUR coatings

VESTANAT® crosslinkers focus on aliphatic polyisocyanate crosslinkers that are light-stable. They are based on e.g. IPDI isocyanurate trimer, for the formulation of one- (1K) and two component (2K) polyurethane systems.

## Polyisocyanate crosslinkers in 2K systems

- Combination with a resin component right before application
- Reaction starts immediately after mixing the polyisocyanate with the resin component
- Reaction leads to a 3D network with a high durability

Resins, Additives, Solvents

A
B
B

#### **Evonik solutions for 2K systems**

**VESTANAT® T**Polyisocyanates; IPDI-trimer

VESTANAT® HT Polyisocyanates; HDI-trimer

VESTANAT® HB
Polyisocyanates; HDI-biuret

# Blocked polyurethane crosslinkers in thermosetting 1K systems

- Contains blocking agents e.g.
   ε-caprolactam
- At ambient temperature: blocked polyurethane crosslinkers cannot react with the resin component
- At elevated temperatures: the blocking agent will be released and the isocyanate group can react with the resin

Resins, Additives, Solvents, Blocked Crosslinkers



#### **Evonik solutions for 1K systems**

VESTANAT® B
Blocked polyurethane crosslinker

VESTANAT ® EP-DS
Waterborne blocked polyurethane crosslinker

These crosslinkers come along with ready-to-react isocyanate groups which can link with isocyanate reactive functionalities e.g. hydroxyl groups. To address the challenges of today and tomorrow we offer high performance crosslinkers for the use in high-end applications.

## **Applications**



# Agriculture & Maintenance Automotive OEM & Car Refinish

VESTANAT® polyisocyanate crosslinkers for the formulation of highly weather- and chemical resistant PUR coatings. VESTANAT® T 1890 imparts faster dry times, which result into remarkably short curing cycles even at ambient temperatures.

VESTANAT® HB / VESTANAT® HT products are used for weather-resistant and light-stable, solvent-borne 2K PUR coatings that can be used in multifarious applications. These products are complementing Evonik Crosslinkers hardener portfolio for coating solutions.





#### **Selection of solutions**

#### VESTANAT° T 1890

Is a cycloaliphatic polyisocyanate crosslinker with a high compatibility. The crosslinker is used for light-stable and weather-resistant 2K PUR systems with improved physical drying properties and chemical resistance.

#### **VESTANAT® B 1358 A**

Is a blocked cycloaliphatic polyurethane crosslinker for the use e.g. in 1K automotive OEM primers generating excellent intercoat adhesion. It is characterized by an excellent balance of reactivity and storage stability.

## VESTANAT° HB 2640/LV VESTANAT° HT 2500/LV

Are aliphatic polyisocyanate crosslinkers based on hexamethylenediisocyanate for achieving weather resistance and light fastness. Blends of VESTANAT® HB 2640/LV or VESTANAT® HT 2500/LV combined with VESTANAT® T 1890 in 2K PUR paints improve drying performance, surface hardness, pot life and chemical resistance against environmental impacts.

#### **Benefits**

- Durability against environmental impacts
- High reactivity even at ambient temperature
- First-class chemical resistance
- Short curing cycles
- Excellent compatibility
- High reactivity

### Can-& Coil Coating

Blocked VESTANAT® polyurethane crosslinkers offer solutions for interior as well as exterior coating applications within the can & coil coating industry. Highly flexible coatings with superior durability are easy to obtain, ensuring prime protection.

### Decorative & Industrial

Unique VESTANAT® DS grades are sophisticated blocked waterborne crosslinkers. These products are available either for anionic or cationic 1K formulations for e.g. glass, metal or textile coatings.







#### **Selection of solutions**

#### **VESTANAT° B 1186 A**

Is a cycloaliphatic blocked polyurethane crosslinker for interior BPA-NI\* can coatings. According to FCN No. 1268, VESTANAT\* B 1186 A is eligible for food contact applications. Please refer to FCN. No. 1268 or get directly in touch with us for further details.

\* BPA-NI = Bisphenol A – not intentionally added

#### **VESTANAT° B 1358 A**

Is a cycloaliphatic blocked polyurethane crosslinker to be used for exterior can coatings.

#### **VESTANAT° EP-B 1481 ND**

Is a cycloaliphatic blocked polyurethane crosslinker to be used for coil coating formulations due to a low tendency to yellow during curing process.

#### **Benefits**

- All can & coil coating applications can be served (food /non-food)
- 1K storage-stable approaches
- Improved sterilization resistance
- High flexibility

#### Selection of solutions

#### **VESTANAT° EP-DS 1205 E**

Is a blocked polyurethane crosslinker based on cycloaliphatic VESTANAT® IPDI emulsified in water without any auxiliary solvents for combinations with anionic or nonionic waterborne OH-terminated resin dispersions.

#### **VESTANAT® EP-DS 1076**

Is a waterborne cationic, 2-acetoneoxime blocked isocyanate crosslinker for combinations with cationic or nonionic stabilized waterborne hydroxylated resins. It can be used solely as a crosslinker or in combination with melamine resins.

#### **Benefits**

- Light stability
- Co-solvent-free















## **Specialties**



Crosslinker specialties adjust your coating systems according to your individual needs and add a unique touch to your formulation.

Our versatile spectrum of specialty products complement your specific application requirements.

Please contact us to elaborate on your tailor-made solution.

## Extract of crosslinker specialties application fields:

- OEM applications
- Maintenance
- Industrial
- Wood
- Plastic coatings

#### Selection of solutions

#### **VESTANAT° T 1890/100**

Is a solvent-free cycloaliphatic polyisocyanate crosslinker which can be used in 2K PUR systems e.g. for the manufacture of PUR resins or blocked polyisocyanates.

Its broad solubility in all types of non-protic solvents gives our customers the chance to chose a solvent which fits best to the coating application.

#### **VESTANAT® B 1358/100**

Is a solvent-free blocked cycloaliphatic polyisocyanate crosslinker which can be used in 1K PUR stoving systems. The solvent-free delivery form offers a great choice of possible solvents to be used with the benefit of the optimization of many paint formulations.

#### **VESTANAT® EP-B 1358 DINP**

Is a cycloaliphatic blocked polyurethane crosslinker component supplied as a solution in diisononylphthalate for the combination with plastisols and organosols. It is specially developed e.g. for under-the-body coatings leading to a solid and resistant result.

#### **VESTANAT® EP-B 1581**

Is a cycloaliphatic blocked polyurethane crosslinker displaying high flexibility and low temperature cure.

#### **VESTAMIN° A 139**

Is a liquid blocked crosslinker for polyisocyanate resins based on a cycloaliphatic diamine. The product exhibits a very low reactivity towards isocyanate groups. The fast crosslinking with polyisocyanate resins occurs under the influence of moisture by releasing the original diamine.

#### **OXYESTER® EP-HS 2272**

Is a linear polyester diol, developed primarily for the use in aliphatic PUR technology, especially as a VOC-reducing co-polyol in 2K PUR high solid coatings.

#### OXYESTER ° T 1136

Is a linear saturated polyester diol. It is mainly applied as a flexibilizing polyol in 2K PUR high solid paints or 1K stoving systems.

#### **Benefits**

- Plug-in tools for the enhancement of your coating formulation
- Faster curing cycles
- Lower VOC contents
- Higher flexibility momentum

Evonik's Business Line Crosslinkers is your perfect partner for innovative product developments and tailormade solutions!



## One partner. Many experts.

#### Evonik for coatings

The coatings industry is one of the most important growth markets for Evonik.

Integrated solutions become more important than simply deliveries of raw materials. The company is rising to this exciting challenge with an industry team for coatings that is active worldwide in order to reach the customers wherever they are and to understand their specific needs.

## Evonik's Paints & Coatings Industry Team consisting of:

- Acrylic Monomers
- Adhesive Resins
- Coatings Additives
- Coating Resins
- Crosslinkers
- Functional Silanes
- Silica


### Evonik brands for coatings

<b>ACEMATT®</b>	NANOPOL®	SILIKOTOP®
AEROSIL®	NANOCRYL®	<b>SIPERNAT®</b>
<b>ALBIDUR</b> <sup>®</sup>	NANOPOX®	TEGO <sup>®</sup>
<b>ALBIFLEX</b> <sup>®</sup>	POLYVEST®	<b>VESTAGON</b> °
<b>DEGADUR</b> °	PROTECTOSIL°	<b>VESTAMIN</b> °
<b>DEGALAN</b> °	SILIKOFTAL®	<b>VESTANAT</b> °
<b>DEGAROUTE</b> °	SILIKOPHEN°	$\textbf{VESTOPLAST}^{\circ}$
DYNAPOL®	SILIKOPON°	<b>VESTOWAX</b> °
<b>DYNASYLAN®</b>	SILIKOPUR°	<b>VISIOMER</b> °



## Competence network for coating solutions

Evonik works closely together with strategic partners. The employees look at the long-term requirements of the end customers and develop new technologies and products. These strategic partnerships are the key to future profitable growth and the continuous development of Evonik's competences for the coatings market. However, sustainable growth is possible only on the basis of intensive cooperation with the customers.

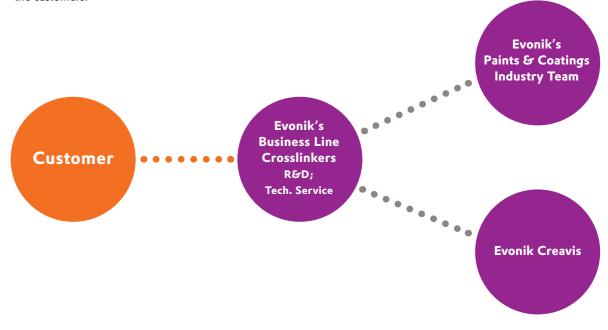

# **VESTANAT® Product range for liquid coating applications** Polyisocyanate crosslinkers for **2K system**

#### **VESTANAT® T** (Polyisocyanates; IPDI-trimer)

	Physical form	NCO content	Viscosity (23°C)	Commercial availability
VESTANAT° T 1890 E	70 % in butylacetate	12.0 %	900 mPas	Worldwide
VESTANAT° T 1890 L	70 % in BuAc /Solvent naphtha (1:2)	12.0 %	1.700 mPas	Worldwide
VESTANAT° T 1890 M	70 % in K 30/Shellsol A (3:1)	12.0 %	4.000 mPas	Worldwide
VESTANAT° T 1890/100	100 % (pellets)	17.3 %	_	Worldwide

#### | **VESTANAT® HT** (Polyisocyanates; HDI-trimer)

	Physical form	NCO content	Viscosity (23°C)	Commercial availability
VECTANIAT® LIT 2500 L	00 0/ :- D. A - /C-l 100 /1 1)	10 / 9/	550 mPas	Europe
VESTANAT® HT 2500 L	90 % in BuAc/Solvesso 100 (1:1)	19.6 %	500 mPas (25 °C )	NAFTA
VESTANAT® HT 2500 LV	100 %, low viscosity (liquid)	23.0 %	1.200 mPas	Еигоре
223774741 777 2300 24	100 70, low viscosity (inquia)	23.0 /0	1.100 mPas (25 °C)	NAFTA
VESTANAT® HT 2500/100	100 % (liquid)	21.8 %	3.000 mPas	Europe
VEST/((V/() 111 2500/ 100	100 // (iiquid)	21.0 /0	2.500 mPas (25 °C)	NAFTA

#### | **VESTANAT® HB** (Polyisocyanates; HDI-biuret)

	Physical form	NCO content	Viscosity (23°C)	Commercial availability
VESTANAT® HB 2640 E	75 % in butylacetate	16.5 %	160 mPas	Europe
VESTANAT HB 2040 E	75 % iii butylacetate	16.3 %	150 mPas (25°C)	NAFTA
VESTANAT® HB 2640 EX	75 % in butylacetate	16.5 %	150 mPas (25 °C)	NAFTA
VESTANAT® HB 2640 MX	75 % in MOP-Acetate/Xylene (1:1)	16.5 %	250 mPas	Europe
VESTANAT® HB 2640 LV	100 %, low viscosity (liquid)	23.0 %	2.150 mPas	Europe
			2.150 mPas (25 °C)	NAFTA
VESTANAT® HB 2640/100	4000((1) 1)	22.2.2/	10.000 mPas	Europe
	100 % (liquid)	22.0 %	7.500 mPas (25°C)	NAFTA

#### Others

	Physical form	OH-value / Amine value	Viscosity (23°C)	Commercial availability
OXYESTER EP-HS 2272 *	100 % (liquid)	215 mg KOH/g	1.300 mPas	Europe
OXYESTER T 1136	100 % (liquid)	107 mg KOH/g	4.000 mPas	Worldwide
VESTAMIN° A 139	100 % (liquid)	400 mg KOH/g	25 mPas	NAFTA,Europe

<sup>\*</sup> EP = Experimental Product

## Blocked polyurethane crosslinkers for 1K system




#### | **VESTANAT® B** (Blocked Polyurethanes; Solvent Borne)

	Physical form	NCO content	Viscosity (23°C)	Blocking agent	Commercial availability
VESTANAT° EP-B 1042 E *	65 % in butylacetate	NCO equivalent approx. 630 g/eq	1.500 mPas	Diethylmalonate	Worldwide
VESTANAT° B 1358 A	63 % in solvent; naphtha	8.0 %	5.000 mPas	Methylethylketoxime	Worldwide
VESTANAT® B 1358 DINP	40 % in diisononylphthalate	5.0 %	20.000 mPas	Methylethylketoxime	Worldwide
VESTANAT° B 1358/100	100 % (flakes)	12.5 %	-	Methylethylketoxime	Worldwide
VESTANAT® B 1370	60 % in BuAc/Xylene (3:5)	8.0 %	2.600 mPas	Acetonoxime	Worldwide
VESTANAT° B 1186 A	60 % in solvent; naphtha	7.1 %	1.200 mPas	ε-caprolactam	Worldwide
VESTANAT° EP-B 1481 ND *	65 % in solvent; naphtha	8.5 %	2.400 mPas	ε-caprolactam	Worldwide
VESTANAT° EP-B 1581 *	75 % in MOPAcetate/Solvent naphtha (1:2)	10.0 %	3.500 mPas	Dimethylpyrazole	Еигоре

#### | VESTANAT® B (Blocked Polyurethanes; Water Borne)

	Physical form	NCO content	Viscosity (23°C)	Blocking agent	Current commercial availability
VESTANAT® EP-DS 1076 *	35 % in water	3.0 %	400 mPas	Acetoneoxime	Europe
VESTANAT® EP-DS 1205 E *	42 % in water	11.0 %	110 mPas	Methylethylketoxime	Europe

#### Blocking agent related curing settings

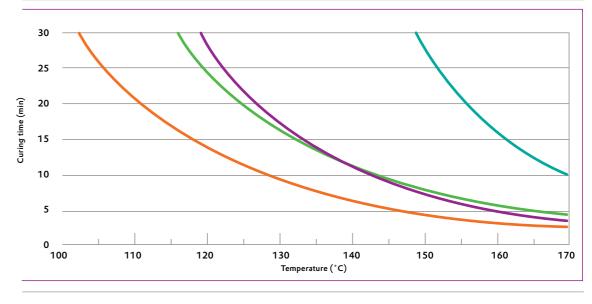

E-caprolactam
Dimethylpyrazole
Oxime
Diethylmalonate

Depending on curing temperature and curing time different VESTANAT® crosslinkers are available.

## Let's get in contact.

#### Comprehensive supply chain & technical service around the world



# Please contact us for any information or requirements e.g. availability, safety data sheets etc.

#### Our experts look forward to serving you

#### **Evonik Resource Efficiency GmbH**

Business Line Crosslinkers Paul-Baumann-Straße 1 45764 Marl Germany

**PHONE** +49 2365 49-9011 **FAX** +49 2365 49-5030

#### **Evonik Speciality Chemicals Co., Ltd.**

Business Line Crosslinkers 55, Chundong Road Xinzhuang Industry Park Shanghai, 201108 PR China

**PHONE** +86 21 6119-1000 **FAX** +86 21 6119-1168

#### **Evonik Corporation**

Business Line Crosslinkers 299 Jefferson Road Parsippany, NJ 07054 USA

PHONE +1 973 929-8000 FAX +1 973 929-8460

