

# AEROSIL® and SIPERNAT®

Efficient and versatile rheology additives for personal care formulations



The effect of AEROSIL® fumed silica on the rheological properties of Personal Care formulations is well recognized and has been exploited in a range of different formulation challenges.


AEROSIL® fumed silica dispersed in an oil matrix can strongly increase its viscosity and profoundly influence its rheology. The more silica that is added to the oil matrix the more viscous the formulation becomes. The resulting dispersion develops non-Newtonian flow behavior and becomes shear thinning and thixotropic. Figure 1 shows the shear dependence of an emollient with added silica thickeners.

Due to the modified rheology a formulation containing silica will not drip from a tube or a jar. With the higher shear forces employed on application, however, it becomes easily spreadable on the skin.

The composition of the liquid matrix is the key parameter for the performance of AEROSIL® rheology additives: A silica that works with one oil composition may prove much less effective in another. However, with the wide range of hydrophilic and surface modified hydrophobic AEROSIL® products available, an efficient rheology additive can be selected for almost any emollient.

Hydrophilic AEROSIL® products are especially recommended for natural formulations following either COSMOS or NATRUE standards.

**Figure 1** Shear force dependence of viscosity for an AEROSIL® dispersion in oil. AEROSIL® R 974 dispersed in two different concentrations in paraffin oil.

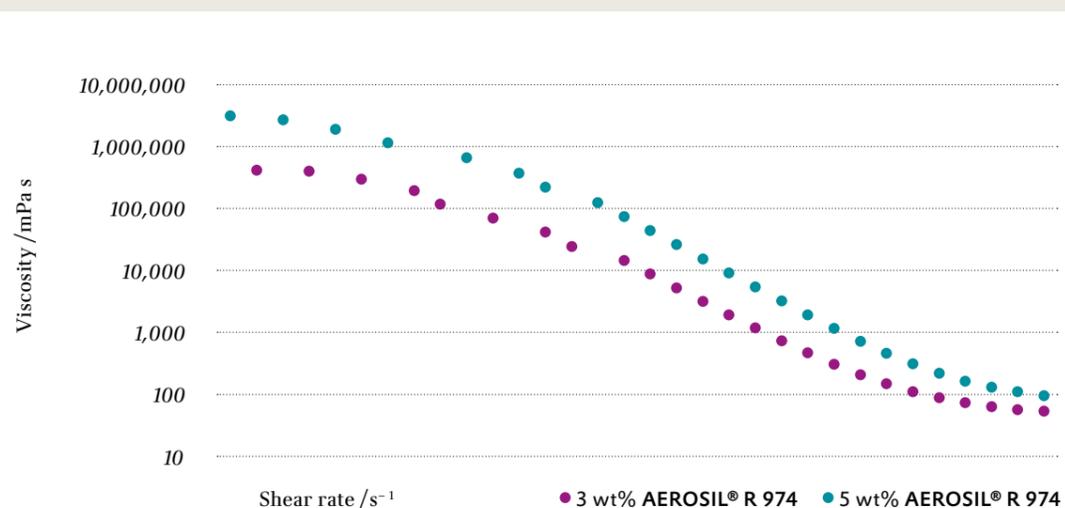

Product	INCI-name	Specific surface area BET / (m <sup>2</sup> /g)	COSMOS	NATRUE <sup>1</sup>	Natural origin index (acc. to ISO 16128) <sup>2</sup>
AEROSIL® 200	Silica	175–225	x	Approved	1
AEROSIL® 300	Silica	270–330	x	Approved	1
SIPERNAT® 380	Hydrated Silica	165	x	Approved	1
SIPERNAT® 22 LS	Hydrated Silica	180	x	Approved	1
SIPERNAT® 500 LS	Hydrated Silica	500	x	Approved	1

**Table 1** Hydrophilic AEROSIL® fumed silica rheology additives and certifications for natural formulations.

<sup>1</sup> Classification as “nature identical mineral” according to Annex 2 (version 3.7), available from [www.natrue.org](http://www.natrue.org) under <http://www.natrue.org/information-for/manufacturers/natrue-criteria/>

<sup>2</sup> Based on the categorization of Silica as “derived mineral ingredients” according to annex D in ISO 16128-1 and the assessment of “derived minerals” according to Table 1 in ISO 16128-2.

Product	INCI-name	Surface modified by	Hydrophobicity	Specific surface area BET / (m <sup>2</sup> /g)
AEROSIL® R 202	Silica Dimethicone Silylate	Polydimethylsiloxane	Very high	80–120
AEROSIL® R 805	Silica Caprylyl Silylate	Organosilane	High	1
AEROSIL® R 812	Silica Silylate	Hexamethyldisilazane	High	1
AEROSIL® R 812 S	Silica Silylate	Hexamethyldisilazane	High	1
AEROSIL® R 816	Silica Cetyl Silylate	Hexadecylsilane	Low	1
AEROSIL® R 972	Silica Dimethyl Silylate	Dimethyldichlorosilane	Moderate	1
AEROSIL® R 974	Silica Dimethyl Silylate	Dimethyldichlorosilane	Moderate	1

**Table 2** Surface-modified, hydrophobic AEROSIL® fumed silica rheology additives.

For selected emollients, information on the efficiency of the AEROSIL® fumed silica rheology additives is given in Table 3. The large number of different oils used for cosmetic applications makes it impossible to include information for each and every emollient. Furthermore, personal care formulations rarely consist of just one emollient. The following rules of thumb may therefore be useful:

Matrix with low polarity	Hydrophilic AEROSIL® fumed silica: AEROSIL® 200, AEROSIL® 300 AEROSIL® grades with low to moderate hydrophobicity: AEROSIL® R 816, AEROSIL® R 974
Highly polar matrix	Strongly hydrophobic AEROSIL® fumed silica: AEROSIL® R 202, AEROSIL® R 805, AEROSIL® R 812 S
Matrix composed of natural triglycerides	Strongly hydrophobic AEROSIL® fumed silica: AEROSIL® R 202, AEROSIL® R 805, AEROSIL® R 812 S Low hydrophobicity: AEROSIL® R 816

With highly efficient AEROSIL® fumed silica additives, rheological performance tends to be very sensitive to concentration. If variable effects are observed it may be useful to use a less efficient rheology additive, depending on the desired rheological profile.

	Emollient	INCI-name	Pure oil	Viscosity (mPa · s)										
				Dispersion with AEROSIL®								Dispersion with SIPERNAT®		
				200	300	R 202	R 805	R 812 S	R 816	R 972	R 974	380	22 LS	500 LS
Emollient	Argan oil	Argania Spinosa Kernel Oil	80	■	■	■	■	■	■	■	■	■	■	■
	Castor oil	Ricinus Communis (Castor) Seed Oil	750	■	■	■	■	■	■	■	■	■	■	■
	Joboba oil	Simmondsia Chinensis (Jojoba) Seed Oil	60	CLEAR	CLEAR	■	CLEAR	■	CLEAR	CLEAR	CLEAR	■	■	■
	Macadamia oil	Macadamia Ternifolia Seed Oil	60	■	■	■	■	■	■	■	■	■	■	■
	Olive oil	Olea Europaea (Olive) Fruit Oil	90	■	■	■	■	■	■	■	■	■	■	■
	Rapeseed oil	Brassica Campestris (Rapeseed) Seed Oil	70	■	■	■	■	■	■	■	■	■	■	■
	Soybean oil	Glycine Soja (Soybean) Oil	80	■	■	■	■	■	■	■	■	■	■	■
	Sunflower oil	Helianthus Annuus (Sunflower) Seed Oil	50	■	■	■	■	■	■	■	■	■	■	■
	Sweet almond oil	Prunus Amygdalus Dulcis (Sweet Almond) Oil	70	■	■	■	■	■	■	■	■	■	■	■
Synthetic	Cyclopentasiloxane	Cyclopentasiloxane	5	■	■	■	■	■	■	■	■	■	×	×
	Mineral oil	Mineral Oil	40	■	■	■	■	■	■	■	■	■	■	■
	Paraffin oil	Paraffinum Liquidum	40	■	■	■	■	■	■	■	■	■	■	■
	Polyethylene glycol	PEG-8	100	■	■	■	■	■	■	■	■	■	■	×
Lipophilic	Dimethicone	Dimethicone	340	■	■	■	■	■	■	■	■	■	■	■
	TEGOSOFT® CT MB	Caprylic/Capric Triglyceride	25	■	■	■	■	■	■	■	■	■	■	■
	Cetearyl isononanoate	Cetearyl Isononanoate	20	■	■	■	■	■	■	■	■	■	■	■
	Cetyl ethylhexanoate	Cetyl Ethylhexanoate	20	■	■	■	■	■	■	■	■	■	■	■
	TEGOSOFT® DEC	Diethylhexyl Carbonate	5	■	■	■	■	■	■	■	■	■	■	■
	TEGOSOFT® E BF MB	PPG-15 Stearyl Ether	80	■	■	×	■	■	■	■	■	■	■	■
	TEGOSOFT® OP MB	Ethylhexyl Palmitate	10	■	■	■	■	■	■	■	■	■	■	■
	TEGOSOFT® TN	C12-C15 Alkyl Benzoate	10	■	■	■	■	■	■	■	■	■	■	×

**Table 3** Recommendations for AEROSIL® and SIPERNAT® rheology additives for selected emollients. Viscosity values for 6 wt-% dispersions of the respective AEROSIL® fumed silica and SIPERNAT® precipitated silica, measured at 20 – 25 °C with a Brookfield viscometer.

Viscosity rating (mPa · s)  
 ■ 0–100 ■ 101–500 ■ 500–1,000 ■ 1,001–2,500 ■ 2,501–5,000 ■ 5,001–10,000 ■ > 10,000 × No data  
 CLEAR: possibility of transparent formulations

### Processing recommendations

To take full advantage of the rheological effect of AEROSIL® fumed silica the fine silica powder needs to be well dispersed in the liquid matrix. Equipment with strong shear forces such as rotor stator mixers or Cowles blade stirrers should preferably be used. The high shear forces break down the AEROSIL® agglomerates that are present in the materials as delivered. On dispersion, these large secondary structures are reduced to smaller structures. The breaking down of the larger AEROSIL® agglomerates not only contributes to the stability of the dispersion but can also improve its clarity. Depending on the individual situation, it may be possible to process AEROSIL® with equipment using lower shear forces. Wetting of the silica at low shear prior to the high shear dispersion process helps to prevent dust formation. It may be necessary to perform the dispersion process under vacuum to prevent air being entrapped in the possibly highly viscous mixture.

### Special requirements

To produce transparent oil formulations with AEROSIL® fumed silica, the refractive index of the oil matrix must match that of the silica (1.45 – 1.46). The clarity of the formulation can be optimized by good dispersion of the silica in the oil and by avoiding entrapment of air bubbles in the gel. In certain cases, choosing a different AEROSIL® fumed silica may also strongly affect the clarity (see Figure 2).

The thickening efficiency of hydrophilic AEROSIL® products

Figure 2 Dispersions of 3 wt% AEROSIL® fumed silica in castor oil.



can be strongly increased by adding viscosity boosters such as polyethylene glycol (PEG), glycerin, or butylene glycol. Figure 3 shows an example of the effect observed for TEGOSOFT® M (INCI name: Isopropyl Myristate), where hydrophilic AEROSIL® 300 alone has no effect on the viscosity. However, addition of relatively small amounts of a booster leads to a strong increase in viscosity, and shear thinning behavior is observed. The use of viscosity boosters can help formulators select a hydrophilic AEROSIL® rheology additive conforming to natural cosmetics standards (e.g., COSMOS or NATRUE) that would not be effective without the booster.

Figure 3 Effect of viscosity boosters on the viscosities produced with hydrophilic AEROSIL® fumed silica. Viscosities of mixtures of TEGOSOFT® M (INCI-name: Isopropyl Myristate) and AEROSIL® 300 with and without viscosity boosters.

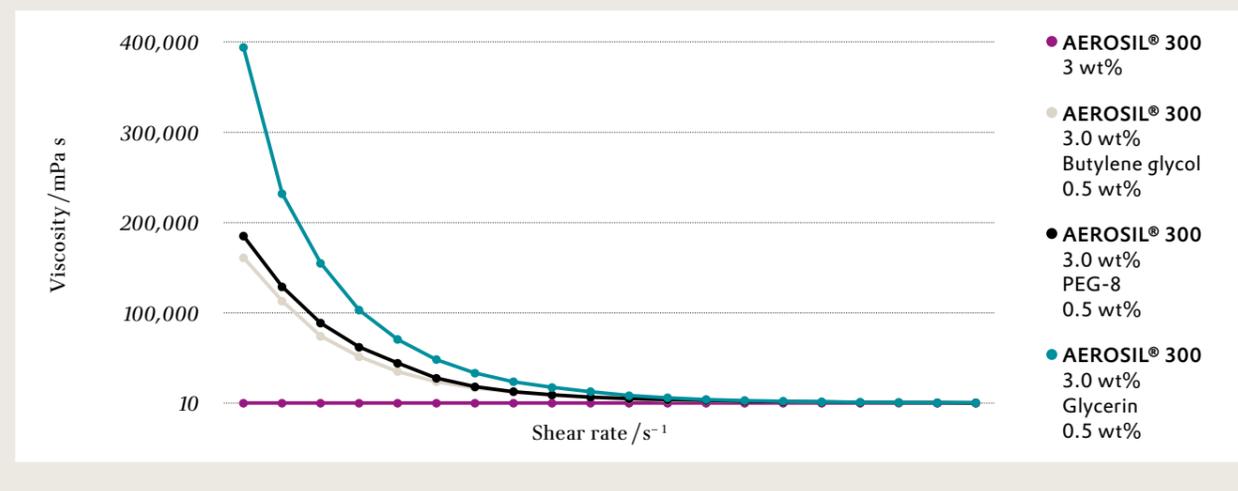


Figure 4 Particle stabilization effect of AEROSIL® silica thickened oil.

Left: colored glass beads in pure oil. Right: glass beads in the same oil with added AEROSIL® fumed silica.



### Further benefits of AEROSIL® fumed silica as rheology modifier

The high viscosities that silica thickeners induce in oil-based formulations can also be used to stabilize dispersions of other particles, such as pigments or antiperspirant salts, to prevent sedimentation (see Figure 4). In aerosol formulations this anti-settling effect helps prevent clogging of the spray nozzle by agglomerated solids.

As the rheological effect is not dependent on temperature, AEROSIL® silica thickeners can significantly improve the temperature stability of oil based pigmented formulations, for example in color cosmetics (see Figure 5).

The increased viscosity imparted by hydrophobic AEROSIL® fumed silica thickeners to a homogeneous oil improves the stability of W/O emulsions. AEROSIL® fumed silica products that are moderately to strongly hydrophobic need to be used to prevent migration of silica into the aqueous phase.

Figure 5 Heat stabilization of a lipstick by adding AEROSIL® after storage at 50° C for 24 h. Left: Lipstick without AEROSIL® fumed silica. Right: Lipstick containing 4 wt % AEROSIL® 200.



#### EUROPE/MIDDLE-EAST/AFRICA

Evonik Operations GmbH  
Smart Effects business line  
Rodenbacher Chaussee 4  
63457 Hanau  
Germany

[ask-se@evonik.com](mailto:ask-se@evonik.com)

[www.evonik.com](http://www.evonik.com)

[www.evonik.com/smarteffects](http://www.evonik.com/smarteffects)

#### AMERICAS

Evonik Corporation  
Smart Effects business line  
2 Turner Place  
Piscataway, NJ 08804  
USA

[ask-se-america@evonik.com](mailto:ask-se-america@evonik.com)

#### ASIA/PACIFIC

Evonik (SEA) Pte. Ltd.  
Smart Effects business line  
3 International Business Park  
#07-18, Nordic European Centre  
Singapore 609927

[ask-se-asia@evonik.com](mailto:ask-se-asia@evonik.com)

This information and any recommendations, technical or otherwise, are presented in good faith and believed to be correct as of the date prepared. Recipients of this information and recommendations must make their own determination as to its suitability for their purposes. In no event shall Evonik assume liability for damages or losses of any kind or nature that result from the use of or reliance upon this information and recommendations. EVONIK EXPRESSLY DISCLAIMS ANY REPRESENTATIONS AND WARRANTIES OF ANY KIND, WHETHER EXPRESS OR IMPLIED, AS TO THE ACCURACY, COMPLETENESS, NON-INFRINGEMENT, MERCHANTABILITY AND/OR FITNESS FOR A PARTICULAR PURPOSE (EVEN IF EVONIK IS AWARE OF SUCH PURPOSE) WITH RESPECT TO ANY INFORMATION AND RECOMMENDATIONS PROVIDED. Reference to any trade names used by other companies is neither a recommendation nor an endorsement of the corresponding product, and does not imply that similar products could not be used. Evonik reserves the right to make any changes to the information and/or recommendations at any time, without prior or subsequent notice.

**AEROSIL®**, **SIPERNAT®** and **TEGOSOFT®** are registered trademarks of Evonik Industries or one of its subsidiaries.