

SELF-LEVELING FLOORS


USED FOR OPTIMUM CHEMICAL RESISTANCE | IMPROVED WEAR RESISTANCE AND LOAD BEARING

BENEFITS

- Optimum chemical resistance
- Improved wear resistance and load bearing
- Good appearance for attractiveness

KEY REQUIREMENTS

- Fast cure for rapid walk-on
- Low carbamation for good adhesion
- Chemical resistance for longevity of floor
- Good appearance for attractiveness

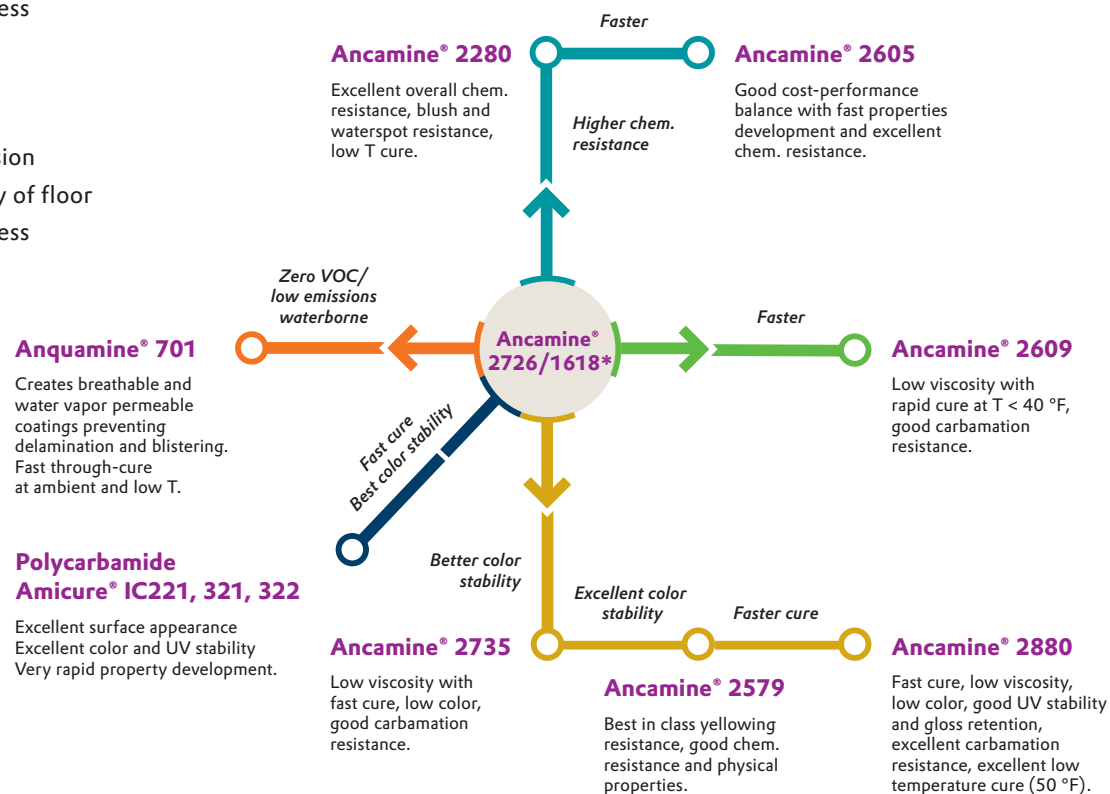

* Good balanced properties, good color stability, moderate carbamation resistance, good chem. resistance.

EVONIK CORPORATION

7001 Hamilton Blvd.
Trexlerstown, PA 18087
Phone: +1 800 345-3148
Outside U.S. and Canada:
+1 610 481-6799

For technical information and support

Americas: picus@evonik.com

Disclaimer

The information contained herein is offered without charge for use by technically qualified personnel at their discretion and risk. All statements, technical information and recommendations contained herein are based on tests and data which we believe to be reliable, but the accuracy or completeness thereof is not guaranteed and no warranty of any kind is made with respect thereto.