

**DESCRIPTION**

Ancamine 2858<sup>®</sup> is a modified cycloaliphatic polyamine intended for use as curing agent for liquid epoxy resin. The product offers a broad balance of chemical resistance and surface appearance properties with a long working pot life. Ancamine<sup>®</sup> 2858 provides high mechanical build, rapid cure and is especially designed for the use in warmer climate zones.

**TYPICAL PROPERTIES**

Property	Value	Unit	Method
Appearance	Yellow Liquid		
Colour	max 12	Gardner	ASTM D 1544-80
Viscosity @ 25°C	100-400	mPa.s	Brookfield RVTD, Spindle 4
Amine Value	270-320	mg KOH/g	Perchloric Acid Titration
Specific Gravity @ 21°C	1.0	g/ml	
Equivalent	95	Wt/{H}	
Recommended use Level	50	PHR	With Bisphenol A diglycidyl ether(EEW=190)



**ADVANTAGES**

- . Excellent chemical resistance
- . Long working pot life

**APPLICATIONS**

- Industrial flooring, screeds, primers, grouts
- Trowel floors
- High solids coatings
- Secondary containment

## TYPICAL HANDLING PROPERTIES\*

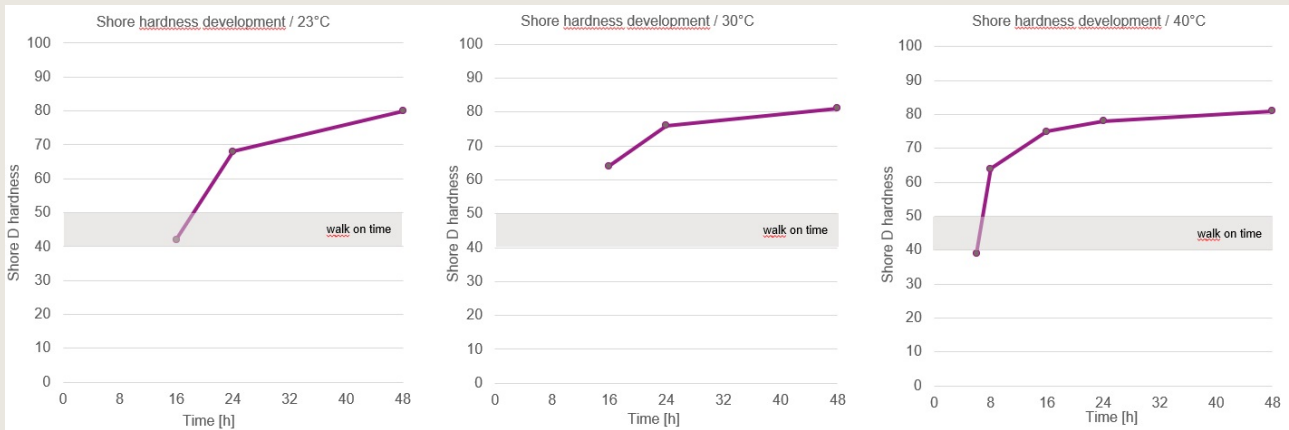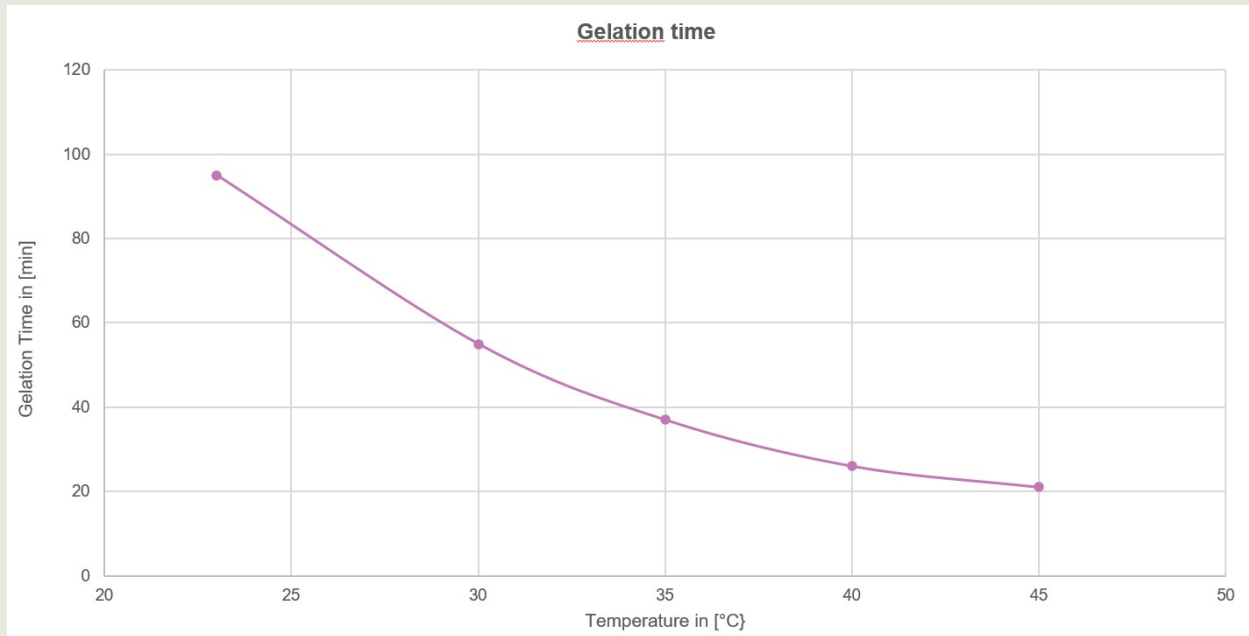

\*With Bisphenol A diglycidyl ether (EEW 190)



## STORAGE AND HANDLING

Refer to the Safety Data Sheet for Ancamine® 2858.

## SHELF LIFE

At least 24 months from the date of manufacture in the original sealed container at ambient temperature. Store away from excessive heat and humidity in tightly closed containers.

Ancamine® is a registered trademark of Evonik Industries AG or one of its subsidiaries.

### Disclaimer

This information and all further technical advice are based on our present knowledge and experience. However, it implies no liability or other legal responsibility on our part, including with regard to existing third party intellectual property rights, especially patent rights. In particular, no warranty, whether express or implied, or guarantee of product properties in the legal sense is intended or implied. We reserve the right to make any changes according to technological progress or further developments. The customer is not released from the obligation to conduct careful inspection and testing of incoming goods. Performance of the product described herein should be verified by testing, which should be carried out only by qualified experts in the sole responsibility of a customer. Reference to trade names used by other companies is neither a recommendation, nor does it imply that similar products could not be used.

### EVONIK OPERATIONS GMBH

Business Line Crosslinkers  
Paul-Baumann-Str. 1  
45764 Marl  
Germany

[www.evonik.com/crosslinkers](http://www.evonik.com/crosslinkers)

**Product Information:** [APCSE@evonik.com](mailto:APCSE@evonik.com)

**Sample Request:** [APCSE@evonik.com](mailto:APCSE@evonik.com)

### EVONIK CORPORATION

Business Line Crosslinkers  
7001 Hamilton Boulevard  
Trexlerstown, PA 18087  
USA

[CrosslinkersProinfo@evonik.com](mailto:CrosslinkersProinfo@evonik.com)

[Crosslinkers-Samples@evonik.com](mailto:Crosslinkers-Samples@evonik.com)

### EVONIK SPECIALTY CHEMICALS (SHANGHAI) CO., LTD.

Business Line Crosslinkers  
55, Chungong Road  
Xinzhuang Industry Park  
Shanghai, 201108  
China

[CL-Asiainfo@evonik.com](mailto:CL-Asiainfo@evonik.com)

[CL-Asiainfo@evonik.com](mailto:CL-Asiainfo@evonik.com)

