

# ANQUAMINE<sup>®</sup> 735

## Curing Agent

### DESCRIPTION

Anquamine 735 curing agent is a water-based curing Agent specifically designed for standard liquid epoxy resin. It is a cost-effective material for high-film build concrete Coatings and is particularly suitable for water-based self leveling systems. Anquamine 735 curing agent can easily emulsify standard liquid epoxy resins without the need for emulsifiers or pre-emulsified epoxy resins. Formulations based on Anquamine 735 curing agent enable highly decorative functional floors without the requirement of plasticizers or solvents.

### TYPICAL PROPERTIES

Property	Value	Unit	Method
Appearance	Amber Liquid		
Colour	<5	Gardner	ASTM D 1544-04
Viscosity @ 77°F	5-15,000	cPs	Brookfield RV, Spindle 34
Amine Value	240	mg KOH/g	Perchloric Acid Titration
Specific Gravity @ 77°F	1.05		
Total Solids Content	55	wt %	
Equivalent Wt/{H}	200		
Recommended use Level	100	PHR	EEW=190

### BENEFITS

- Cost effective
- Rapid hardness development
- Excellent adhesion to concrete
- Low color and good yellowing resistance
- Excellent surface appearance
- Zero VOC

### APPLICATIONS

- Self-leveling floors
- Mortars
- Grouts

## STORAGE AND HANDLING

Refer to the Safety Data Sheet on Anquamine 735 curing agent.

## TYPICAL CURE SCHEDULE

2 to 7 days at ambient temperature.

## TYPICAL HANDLING PROPERTIES \*

Property	Value	Unit	Method
Pot Life	35-50	min	

## TYPICAL PERFORMANCE \*

Property	Value	Unit	Method
1 day Shore D @ 25°C 55% RH	67		
7 day Shore D @ 25°C 55% RH	80		
Compressive Strength after 28 days	5800	psi	ASTM C579


\* Self-leveling starting point formulation.

## SUPPLEMENTARY DATA

**ANQUAMINE 735 CURING AGENT CHARACTERISTICS AND APPLICATIONS:** Anquamine 735 curing agent has been specifically designed for cost effective high film build concrete protection, such as self-leveling flooring systems, typically applied at 1-3 mm coating thickness. Anquamine 735 self-leveling system enables smooth surfaces on uneven substrates, high abrasion resistance and good chemical resistance for industrial floor applications.

**COST-IN-USE COMPARISON — WATERBORNE SELF LEVELING:** Epoxy self-leveling flooring is commonly used to protect concrete as it offers optimum handling properties and maximum protection of the concrete in terms of durability, abrasion and chemical resistance. In self-leveling Systems based on Anquamine 735 curing agent the amount of binder in the formulation can be reduced compared to solvent free systems and yield high performance, thus providing a cost effective, optimum handling and high performance concrete protection system.

Anquamine 735 curing agent is ideal to formulate a self leveling system to provide optimum cost performance concrete protection. In solvent free systems an excess amount of binder is required to offer self-leveling properties, which contributes to high material cost. In contrast, a self-leveling system based on Anquamine 735 curing agent can be formulated to offer optimum protection with a reduced amount of binder. Flow characteristics will be adjusted by incorporation of water, thereby reducing the coating cost as well. Anquamine 735 self-leveling systems can offer a cost-in-use advantage over solvent free systems of approximately 20%.

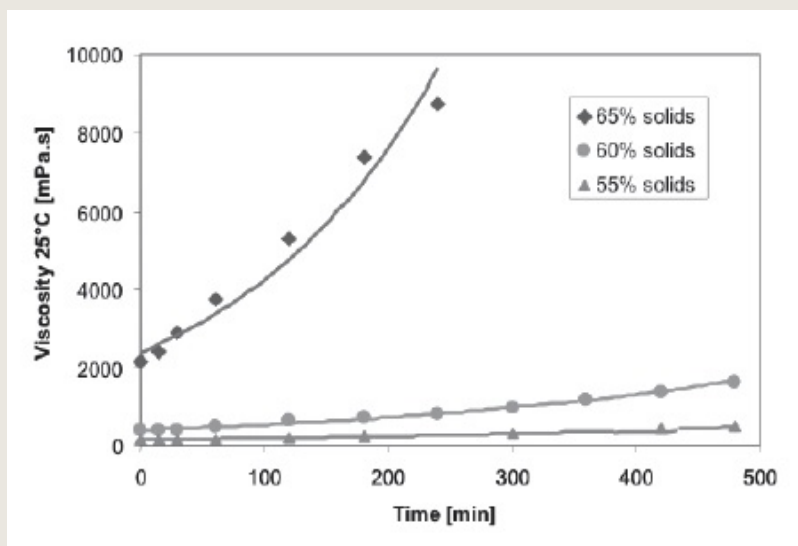

**APPLICATION ROBUSTNESS:** To enable high performance and durability, the adhesion and resistance to delamination and deformation have been tested on a variety of substrates. The photographs attached display a test method under which a formulated self-leveling system is applied in 39 x 2in, 1/8 inch thick strips (approximately 250g of formulation) to a polyethylene sheet. The non-porous nature of this substrate and the consequent poor adhesion provides a methodology where any system shrinkage can be visually determined. These strips are then measured for deviation from horizontal, and the length of the strip is measured with a flexible measuring tape. The results in Table 1 compare the Anquamine 735 formulation to a system that shows shrinkage on this substrate. The durability of the Anquamine 735 self-leveling formulation indicates low internal stress development within the system, therefore enabling robust flooring with a resultant high adhesion to concrete substrate.

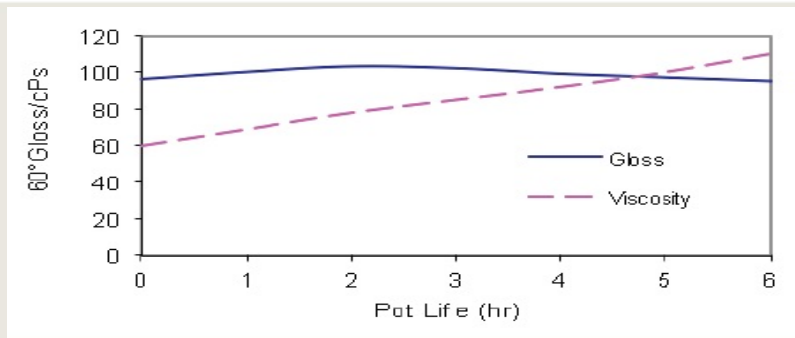


TABLE 1: RESULTS OF APPLICATION ON NON-POROUS SUBSTRATE

	Displacement from Horizontal	Length
Anquamine 735	<1/24 in	39 in
WB Self Leveler	1 in	37.5 in

HIGHLY DECORATIVE AND FUNCTIONAL FLOORING SYSTEMS: Self leveling floors based on Anquamine 735 curing agent provide a satin/matte finish, thereby reducing the visibility of floor defects and decreasing scratch sensitivity. However, the surface is highly adaptable and can be modified to produce highly decorative gloss surface appearances. Due to the inherent good overcoat ability, the self-leveling floor can be readily coated with a transparent sealer or topcoat to produce a high gloss or decorative finish with improved chemical resistance and cleanability. The surface can be easily modified by broadcasting sand or pigment effects and sealed with a transparent topcoat such as an industrial two component polyurethane coating, waterborne polyurethane / acrylic hybrid dispersions (e.g. Hybridur® 870 dispersion), or two component waterborne epoxy systems (e.g., those based on Anquawhite® 100 curing agent), to offer highly decorative or non-slip flooring.

## PHYSICAL PROPERTIES

TABLE 2: TYPICAL PROPERTIES OF SELF LEVELING FLOOR SYSTEMS

Physical Properties	Anquamine 735	Cycloaliphatic (50phr)
Surface Appearance	Satin / Matte	High Gloss
Compressive Strength (28 days)	5,800 psi	9,500 psi
Water Vapor Transmission (g/m <sup>2</sup> s)	1.4 X 10 <sup>-3</sup>	6.5 X 10 <sup>-6</sup>
Adhesion to Damp Concrete	250 psi	50 psi
Impact Resistance	160 in/lbs	80 in/lbs
Abrasion Resistance (Taber C17)	300 mg	270 mg

Good compatibility has been found with a number of universal tinting systems commonly used in waterborne acrylic Coatings and commercial pigment pastes such as Tint-Ayd® CW pigment concentrates (Elementis), Aquatone® Dispersions (Sun Chemicals) and Colortrend® and Chroma-Chem® colorants (Evonik). This compatibility allows for a wide color pallet, making systems based on Anquamine 735 curing agent very versatile and able to offer a highly decorative solution to concrete protection. The self-leveling formulation based on Anquamine 735 curing agent can be used with standard tinting systems to give decorative flooring of various colors.


The Anquamine 735 curing agent based self-leveling system also offers a high level of protection to the substrate, protecting it from abrasion, impact and chemical attack. The following table shows the physical properties of a self leveling system based on Anquamine 735 curing agent compared to the typical properties of a solvent free cycloaliphatic system.

In addition, this system provides high resistance to impact, e.g. from falling heavy objects. Upon impact a 'dent', but no cracking, may occur so that concrete would be further protected without extensive repair work.

The water vapor transmission data indicates that a self-leveling system based on Anquamine 735 curing agent provides significantly increased permeability resulting in resistance to Osmotic blistering on concrete substrate with a high level of residual water (e.g. fresh concrete) or a high water table.

**FAST RETURN TO SERVICE:** The self-leveling flooring system based on Anquamine 735 curing agent offers very fast property development, allowing for a rapid return to service. The property development is demonstrated at 25°C and 10°C indicating that even at low temperatures the system will produce walk-on hardness quickly, Figure 1. The system can withstand light traffic after limited cure time allowing for the floor to be back in service or over coated with a further decorative surface finish much quicker than competitive technologies. This has the advantage of reducing the time a floor would be out of service, which has economic and logistical advantages.

**FIGURE 1: SHORE D HARDNESS AS A FUNCTION OF TIME OF CURE FOR ANQUAMINE 735 SELF LEVELING FORMULATION**

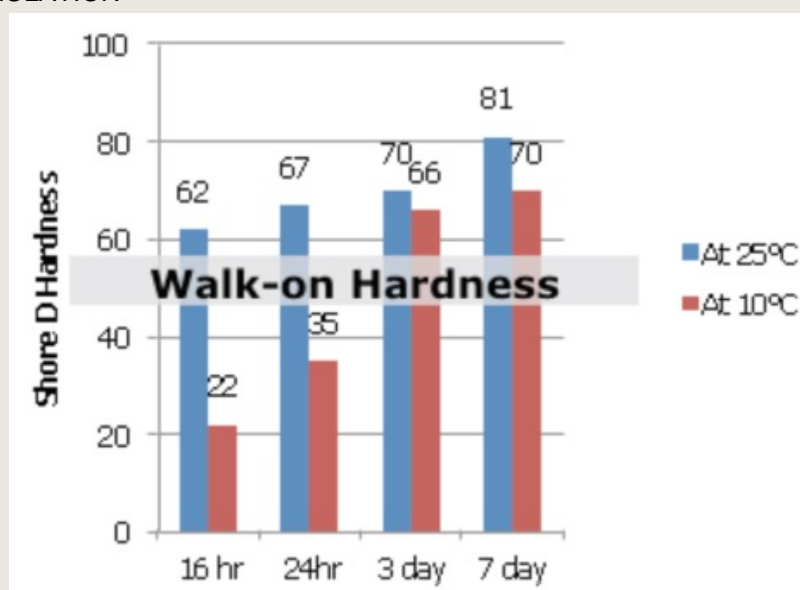

## FORMULATION GUIDELINES

**EPOXY RESINS:** Anquamine 735 curing agent exhibits good compatibility with liquid epoxy resins based on modified or unmodified Bisphenol A or F. Reactive diluent modified epoxy resin can offer improved handling and formulating latitude within the self-leveling system. It is recommended to use a difunctional reactive diluent such as Epodil<sup>®</sup> 750 diluent or hexanediol diglycidyl ether at up to 15% to improve workability / handling while retaining property development and chemical resistance. Alternatively Epodil 748 diluents can be used showing good compatibility but reduction in cure speed and property development.

**DEFOAMER/WETTING AGENT:** Defoamers such as Surfynol DF75, Surfynol DF700, and BYK<sup>®</sup> 045 are very suitable for use in the self-leveling formulation to give optimum air release and surface properties. Zetasperse<sup>™</sup> 1600 and Disperbyk<sup>®</sup> 190 can be used to effectively aid in wetting out pigments and increasing flow and leveling properties to give a system which yields good surface and flow properties.

**FILLERS:** The filler package is optimized with the correct balance of sand grades to yield a system with good flow and leveling. Quartz sand and barytes are recommended to be used in combination with dry pigments or pre-dispersed pigment pastes to enable the desired performance and aesthetics. It is very important to have the correct particle size distribution of the fillers. Attention should also be paid to the shape and angularity of the fillers that are being used. These can greatly affect the flow and leveling of the system.

## ANQUAMINE® 735 CURING AGENT — CONCRETE PRIMER

This formulation is intended for use as a primer to be applied directly to concrete and is ideally suited as a primer for an Anquamine 735 self-leveler or mortar formulation.

### CONCRETE PRIMER

A-Component		Supplier	Concrete Primer
1. Curing agent	Anquamine 735	Evonik	50.00
2. Diluent	Water	Local	10.00
			<b>60.00</b>
B-Component			
3. Epoxy resin	Bisphenol A DGE	Various	45.00
4. Epoxy resin	Epodil® 748	Evonik	5.00
			<b>50.00</b>
C-Component			
5. Diluent	Water	Local	<b>84.00</b>

After mixing Part A and B the formulation is diluted to 40% solids with water and is ready to apply.

### TECHNICAL DATA

<b>Density (g/ml)</b>	Part A / B / C	1.05 / 1.03 / 1.00
	Mix	1.03
<b>Solid Content (%)</b>	Part A / B / C	46 / 100 / 0
	Mix	40
<b>Pot-life</b>	Minutes	30
<b>Mix Viscosity (cPs)</b>	Initial	150
	15 minutes	530
	30 minutes	3000
<b>Dry-time (BK Recorder) (h)</b>	Tack Free	1.5
	Dry Hard	5.5
<b>Persoz Hardness</b>	24 hour	225
	7 days	270
	14 days	320

## ANQUAMINE® 735 CURING AGENT — 2K WATERBORNE SELF-LEVELLING FLOOR

This formulation is ideally suited as a self-leveling compound for concrete floors. For optimum performance it should be applied at 1-3mm in thickness.

A-Component		Supplier	Self-Levelling Floor – 2K
1. Curing agent	Anquamine 735	Evonik	10.00
2. Defoamer	BYK® 1770	BYK	0.50
3. TiO <sub>2</sub>	Kronos® 2160	Kronos	3.80
4. Diluent	DI Water	Local	11.50
5. Filler	Cimbar 325	Cimbar	13.00
6. Filler	Sil-Co-Sil #106	US Silica	16.00
7. Filler	Quartz sand (~150µm)	US Silica	26.00
8. Filler	Quartz sand (Coarse ~300µm)	US Silica	19.00
9. Thixotropic Agent	Xanthum Gum (3% aq.)	Various	0.20
			<b>100.00</b>

### Part A Manufacturing Procedure:

Charge components 1 and 2 and stir homogeneous at low shear  
 Slowly add components 3 and partial 4 while increasing speed to 10-20 m/s for 10-15 min.  
 Add remaining components at low shear rate.

B-Component			
10. Epoxy resin	Bisphenol A DGE	Various	8.55
11. Epoxy resin	Epodil 748	Evonik	0.95
<b>Total</b>			<b>109.50</b>

After mixing Part A and B the formulation is ready to apply.



## TECHNICAL DATA

<b>Density [g/ml]</b>	Part A	1.8
	Part B	1.09
	Mix	1.56
<b>Shore D Hardness</b>	1 Day @10°C	35
	7 Days @10°C	70
	1 Day @25°C	62
	7 Days @25°C	81
<b>Solid Content (wt%)</b>	Part A	84
	Part B	100
	Mix	85
<b>Binder content</b>	%	13.6
<b>Working Time</b>	Mins	45
<b>Filler : Binder Ratio</b>		5.2:1
<b>Gloss</b>	60°C	5
<b>Chem. Resistance 24 hour, spot test</b>	3% Acetic	No Effect
	10% NaOH	No Effect
	Ethanol	No Effect
	Xylene	No Effect
	Water	No Effect
<b>Stain Resistance 24 hour, spot test</b>	Red Wine	No Effect
	Tea	No Effect
	Coffee	No Effect
	Cola	No Effect
	Mustard	No Effect
	Ketchup	Slight stain

## ANQUAMINE® 735 CURING AGENT — TILE GROUT, ADHESIVE

This formulation is ideally suited as a tile adhesive / grout or thixotropic filler and can be applied with a trowel or similar to a variety of substrates.

A-Component		Supplier	Grout
1. Curing agent	Anquamine 735	Evonik	7.7
2. Defoamer	Surfynol DF-75	Evonik	0.17
3. Diluent	Water	Local	7.3
4. Pigment	Kronos® 2160	Kronos	1.00
5. Filler	Cimbar 325	Cimbar	21.9
6. Filler	Sil-Co-Sil #106	US Silica	11.6
7. Filler	Quartz Sand	US Silica	13.2
8. Filler	Fillite 500	OMYA	2.3
			<b>65.17</b>
B-Component			
8. Epoxy resin	Bisphenol A DGE	Various	7.3
9. Epoxy resin	Epodil 748	Evonik	1.3
10. Epoxy resin	Epodil LV-5	Evonik	1.7
11. Surfactant	Surfynol 420	Evonik	0.13
12. Defoamer	Surfynol DF-75	Evonik	0.03
13. Thixotrope	Bentone SD-2	Benton	0.17
14. Pigment	Bayferrox 318	Lanxess	1.00
15. Cement	Portland Cement	Local	23.2
			<b>33.83</b>
<b>Total</b>			<b>100.00</b>

After mixing Part A and B for 2-3 minutes until the system is fully homogeneous the system is ready to apply.

### TECHNICAL DATA

<b>Density [g/ml]</b>	Part A	1.84
	Part B	1.72
	Mix	181
<b>Shore D Hardness</b>	1 Day @25°C	53
	2 Days @25°C	73
<b>Mix Solid Content</b>	Weight %	88
<b>Working Time</b>	Minutes	30
<b>Compressive Strength - 7 days</b>	psi	4800



## ANQUAMINE® 735 CURING AGENT — TROWEL APPLIED MORTAR

This formulation is ideally suited as a repair compound / mortar for concrete floors and can be applied with a trowel to give a smooth surface for further coating applications.

A-Component		Supplier	Mortar
1. Curing agent	Anquamine 735	Evonik	65.00
2. Defoamer	Byk® 045	Byk	5.20
3. Diluent	Water	Local	14.80
			<b>85.00</b>
B-Component			
4. Epoxy resin	Bisphenol A DGE	Various	58.50
5. Epoxy resin	Epodil® 748	Evonik	6.50
			<b>65.00</b>
Total			<b>100.00</b>
C-Component			
6. Filler	Quartz Powder M600	Sibelco	50.00
7. Filler	Quartz Powder M31	Sibelco	200.00
8. Filler	Quartz Sand (0.2-0.4)	US Silica	350.00
9. Filler	Quartz Sand (0.7-1.2)	US Silica	300.00
10. Filler	Quartz Sand (1.0-1.7)	US Silica	100.00
			<b>1000.00</b>
<b>Total</b>			<b>1150.00</b>

After mixing Part A and B for 2-3 minutes until the system is fully homogeneous, Part C can be added to form the mortar system. Once Part C is fully dispersed in the Part A / B mixture the system is ready to apply.

### TECHNICAL DATA

<b>Density [g/ml]</b>	Part A	1.05
	Part B	1.13
	Part C	2.66
	Mix	2.23
<b>Shore D Hardness</b>	1 Day @ 25°C	70
	7 Days @ 25°C	80
<b>Working Time</b>	Minutes	45

Anquamine® is a registered trademark of Evonik Industries AG or one of its subsidiaries.

**Disclaimer**

This information and any recommendations, technical or otherwise, are presented in good faith and believed to be correct as of the date prepared. Recipients of this information and recommendations must make their own determination as to its suitability for their purposes. In no event shall Evonik assume liability for damages or losses of any kind or nature that result from the use of or reliance upon this information and recommendations. EVONIK EXPRESSLY DISCLAIMS ANY REPRESENTATIONS AND WARRANTIES OF ANY KIND, WHETHER EXPRESS OR IMPLIED, AS TO THE ACCURACY, COMPLETENESS, NON-INFRINGEMENT, MERCHANTABILITY AND/OR FITNESS FOR A PARTICULAR PURPOSE (EVEN IF EVONIK IS AWARE OF SUCH PURPOSE) WITH RESPECT TO ANY INFORMATION AND RECOMMENDATIONS PROVIDED. Reference to any trade names used by other companies is neither a recommendation nor an endorsement of the corresponding product, and does not imply that similar products could not be used. Evonik reserves the right to make any changes to the information and/or recommendations at any time, without prior or subsequent notice.

**EVONIK OPERATIONS GMBH**

Business Line Crosslinkers  
Paul-Baumann-Str. 1  
45764 Marl  
Germany

[www.evonik.com/crosslinkers](http://www.evonik.com/crosslinkers)

**Product Information:** [APCSE@evonik.com](mailto:APCSE@evonik.com)

**Sample Request:** [APCSE@evonik.com](mailto:APCSE@evonik.com)

**EVONIK CORPORATION**

Business Line Crosslinkers  
7001 Hamilton Boulevard  
Trexlerstown, PA 18087  
USA

[CrosslinkersProinfo@evonik.com](mailto:CrosslinkersProinfo@evonik.com)

[Crosslinkers-Samples@evonik.com](mailto:Crosslinkers-Samples@evonik.com)

**EVONIK SPECIALTY CHEMICALS  
(SHANGHAI) CO., LTD.**

Business Line Crosslinkers  
55, Chundong Road  
Xinzhuang Industry Park  
Shanghai, 201108  
China

[CL-Asiainfo@evonik.com](mailto:CL-Asiainfo@evonik.com)

[CL-Asiainfo@evonik.com](mailto:CL-Asiainfo@evonik.com)

