

Additives for Adhesives







Contents

- 04 : **DEFOAMERS**
- 05 : Defoamers for water-based adhesives
- 07 : Defoamers & Deaerators for reactive & solvent-based adhesives
- 08 : **WETTING AGENTS**
- 09 : Wetting agents for water-based adhesives
- 11 : **DISPERSING AGENTS**
- 12 : Dispersing agents for water-based and reactive resin adhesives
- 14 : **RHEOLOGY MODIFIERS**
- 15 : Rheology Modifiers for water-based adhesives
- 16 : Food contact compliance



DEFOAMERS

Our TEGO® Antifoam products are used in the production of polymer dispersions as well as in adhesive formulations. Many aqueous adhesives tend to foam due to their chemical composition.




To differentiate between the creation of macrofoam and microfoam, the experts use products from the TEGO® Antifoam range.


The foaming behavior can be critical either during the adhesive formulation step or during adhesive application, such as coating or lamination. In fast application adhesives, like for gravure rolls, the occurrence of foam can lead to problems that directly influence the productivity. Moreover, a strong foaming adhesive will most likely not meet the required product specifications

(adhesion forces, transparency of the adhesive films or a defect free coating). Defoamers are used either to suppress the formation of foam or to effectively destroy foam bubbles once they are formed. A very small amount of TEGO® Antifoam can increase the speed of production, help to avoid defects and scrap, and reduce production costs.




The foaming tendency of the various base resins, and especially the surfactants used in these systems require different defoamers to provide an optimum level of efficiency and compatibility. None of the TEGO® Antifoams listed below contain silicone oil or APEO.


DEFOAMERS FOR WATER-BASED ADHESIVES

Product name	Chemical base	Delivered as	Appearance	pH value (100g/l in water, 25 °C)	Viscosity at 25 °C [mPas]
TEGO® Antifoam 1488	Polyether siloxane	20% active emulsion	white liquid	7–9	50–250
TEGO® Antifoam 2-89	Polyether siloxane	20% active emulsion	white liquid	6–9	220 – 620
TEGO® Antifoam 204	Polyether siloxane	20% active emulsion	white liquid	7–9	50–250
TEGO® Antifoam 4-88	Polyether siloxane	40% active emulsion	white liquid	7	200–400
TEGO® Antifoam 4-94	Polyether siloxane	40% active emulsion	white liquid	6–9	200–500
TEGO® Antifoam KE 600 EC	Polyether + siloxane	60% active emulsion	white liquid	7–9	80–400
TEGO® Antifoam 2290	Paraffinic oil	100% active self-emulsifiable concentrate	yellowish liquid	5–8	50–200
TEGO® Antifoam 2291	Paraffinic oil	100% active self-emulsifiable concentrate	yellowish, cloudy liquid	5–8	100–500
TEGO® Antifoam 2450 	Vegetable oil	100% active self-emulsifiable concentrate	yellowish liquid	5–8	100–600
TEGO® Antifoam 2458 	Vegetable oil	100% active self-emulsifiable concentrate	yellowish liquid	5–8	100–400
TEGO® Antifoam 2460	Mineral oil	100% active self-emulsifiable concentrate	yellowish, cloudy liquid	5–8	50–120
TEGO® Antifoam 3045	Polyether	100% active self-emulsifiable concentrate	hazy, white to pale yellow liquid	5–7	approx. 350
TEGO® Antifoam KS 53 	Vegetable oil	100% active self-emulsifiable concentrate	light yellow, cloudy liquid	6–7	130–210
TEGO® Antifoam D 2315	Polyether siloxane	100% active concentrate	slightly yellowish liquid	6–8	approx. 1000

 = biobased

DEFOAMERS FOR WATER-BASED ADHESIVES

Name	Density at 20 °C [g/m ³]	VOC via DIN ISO 11890/2 [%]	SVOC via DIN ISO 11890/2 [%]	For application in water-based adhesive formulations based on				
				Acrylates	PVAc/VAE/PVOH	SBR/NBR/Latex	PU	PF/MF/MUFresins
TEGO® Antifoam 1488	approx. 1.0	approx. 0.2	approx. 0.7	●	●	○		
TEGO® Antifoam 2-89	approx. 1.0	approx. 0.2	approx. 0.5	●	●	○		
TEGO® Antifoam 204	approx. 1.0	approx. 0.9	approx. 0.6	●	○	●		
TEGO® Antifoam 4-88	approx. 1.0	approx. 0.4	approx. 0.1	●	○	○		
TEGO® Antifoam 4-94	approx. 1.0	approx. 0.5	approx. 0.1	●	○			
TEGO® Antifoam KE 600 EC	approx. 1.0	approx. 0.7	approx. 0.1	●	○			
TEGO® Antifoam 2290	approx. 0.9	< 0.02	approx. 26.5	○	●	●	○	○
TEGO® Antifoam 2291	approx. 0.9	approx. 0.03	approx. 0.1	○	●	●		○
TEGO® Antifoam 2450 	approx. 1.0	nd *	nd *	●	○			●
TEGO® Antifoam 2458 	approx. 1.0	< 0.1	approx. 0.2	○	●	○		
TEGO® Antifoam 2460	approx. 0.9	nd *	nd *					●
TEGO® Antifoam 3045	approx. 1.0	< 0.1	< 0.1		●			●
TEGO® Antifoam KS 53 	approx. 1.0	approx. 0.2	< 0.05	○	●		○	
TEGO® Antifoam D 2315	approx. 1.0	approx. 1.3	approx. 0.3	●		●		

 = biobased

*not detected

● recommended

○ suitable

DEFOAMERS & DEAERATORS FOR REACTIVE & SOLVENT-BASED ADHESIVES

Name	Chemical base	Delivered as	Appearance	Flash point [°C]	Viscosity at 25 °C [mPas]
TEGOPREN® 5863	Polyether siloxane	100% active	yellowish, dull liquid	> 110	approx. 3000
TEGO® Antifoam D 3944	Polymeric mixture, with a tip of silicone	100% active	turbid, yellowish liquid	144	approx. 3000
TEGO® Antifoam D 2340	Polymer solution in mineral oil, with a tip of silicone	15% active in solvent mixture	colourless to brown liquid	46	approx. 1000
TEGO® Antifoam D 2315	Polyether siloxane	100% active	slightly yellowish liquid	114	200–400

*not detected

Name	Density at 20 °C [g/m³]	VOC via DIN ISO 11890/2 [%]	SVOC via DIN ISO 11890/2 [%]	For systems based on
TEGOPREN® 5863	approx. 1.0	nd *	nd *	Silane-modified polymers (SMP)
TEGO® Antifoam D 3944	approx. 0.9	approx. 3.0	approx. 0.7	Silane-modified polymers (SMP), PUR, Epoxide
TEGO® Antifoam D 2340	approx. 0.9	nd *	nd *	PUR, Epoxide, Acrylate
TEGO® Antifoam D 2315	approx. 1.0	approx. 1.3	approx. 0.3	PUR, Epoxide, Acrylate


*not detected

WETTING AGENTS

In order to spread the adhesive across the surface, wetting agents play an important part of an adhesive formulation.

We offer different kinds of products based on our versatile technologies of organomodified siloxanes, organic chemistry and acetylenic technology.

We can create the property profile you need to best suit your application. Whether it is extremely good wetting, low dynamic surface tension for curtain coating or a standard sulfosuccinate, we have what you need. We also provide special wetting agents with low foaming tendencies.

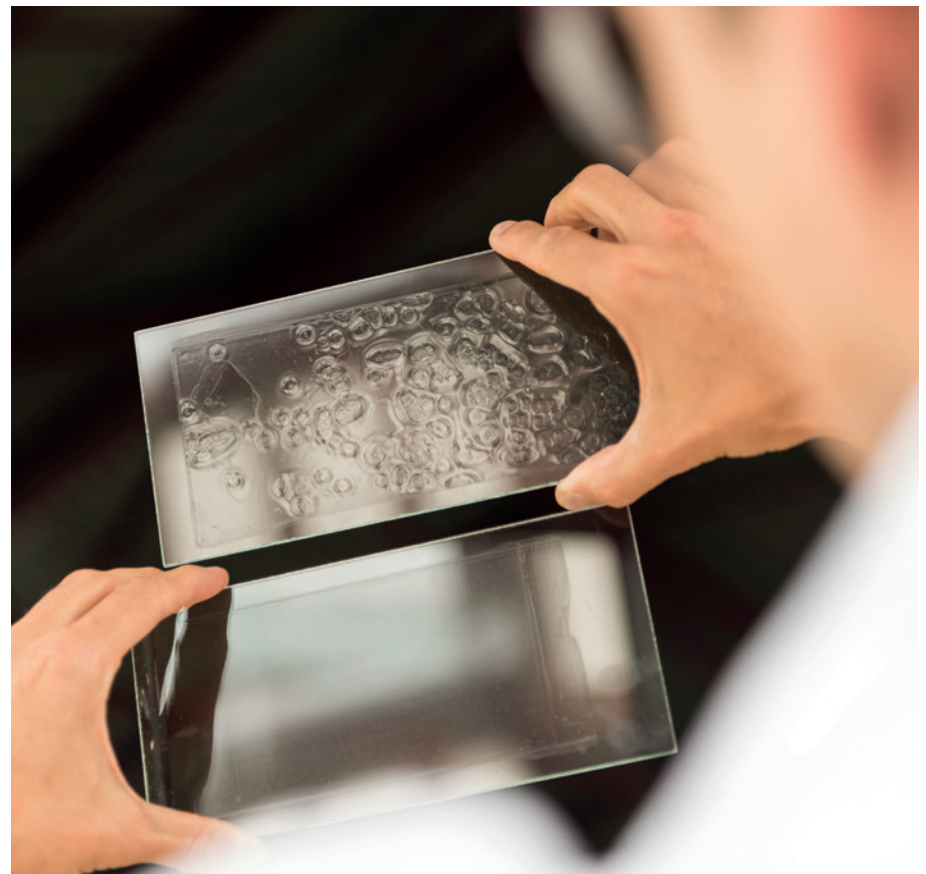

WETTING AGENTS FOR WATER-BASED ADHESIVES

Product name	Chemical base	Delivered as	Appearance	Flash point [°C]	Viscosity at 25 °C [mPas]
SURFYNOL® AS 5000	Gemini surfactant, acetylenic	50 % active solution	pale, yellow liquid	111	approx. 100
SURFYNOL® AS 5020	Ethoxylated gemini surfactant, acetylenic	100% active concentrate	clear, yellow liquid	> 108	approx. 212
SURFYNOL® AS 5040	Ethoxylated gemini surfactant, acetylenic	100% active concentrate	amber liquid	> 110	approx. 81 (35 °C)
SURFYNOL® AS 5060	Alkoxylated gemini surfactant, acetylenic	100% active concentrate	clear, pale yellow liquid	174	approx. 110
SURFYNOL® AS 5080	Blend of gemini surfactants, acetylenic	100% active concentrate	clear, yellow liquid	188	approx. 230
SURFYNOL® AS 5100	Blend of acetylenic gemini and anionic surfactants	81% active concentrate	clear to hazy, yellow liquid	> 230	approx. 190
SURFYNOL® AS 5120	Anionic surfactant blend	75% active concentrate	clear hazy, colorless to pale yellow liquid	> 100	approx. 350
SURFYNOL® AS 5140	Anionic surfactant blend	85% active concentrate	clear colorless to pale yellow liquid	> 184	approx. 890
SURFYNOL® AS 5160	Anionic surfactant	75% active concentrate	nearly colorless, clear liquid	25	approx. 100
TEGOPREN® 5840	Organomodified Siloxane	100% active concentrate	colorless to light yellow liquid	< 140	40–90
TEGOPREN® 5885	Siloxane based gemini surfactant	100% active concentrate	clear to slightly turbid, yellowish to brownish liquid	> 100	70–250
TEGOPREN® 5890	Organomodified Siloxane	100% active concentrate	clear, yellowish liquid	100	160–230

WETTING AGENTS FOR WATER-BASED ADHESIVES

Name	Density at 20 °C [g/m ³]	Cloud point, 0.1% in water [°C]	VOC via DIN ISO 11890/2 [%]	SVOC via DIN ISO 11890/2 [%]	Surface tension***		wetting of		
					Static (bubble life time 5000 ms)	Dynamic (bubble life time 30 ms)	Glass	PE/PE film	Siliconized paper
SURFYNOL® AS 5000	approx. 1.0	< RT	nd **	nd **	34	37	●	●	
SURFYNOL® AS 5020	approx. 1.0	< RT	nd **	nd **	33	38	○	○	●
SURFYNOL® AS 5040	approx. 1.0	58	approx. 0.7	approx. 34.3	35	40	●	●	●
SURFYNOL® AS 5060	approx. 1.0	46	approx. 0.8	approx. 12.0	35	42	●	●	●
SURFYNOL® AS 5080	approx. 1.0	< RT	approx. 0.2	approx. 9.2	27	39	●	●	●
SURFYNOL® AS 5100	approx. 1.1	> 100	nd **	nd **	27	39			●
SURFYNOL® AS 5120	approx. 1.0	28	approx. 0.7	approx. 11.9	29	42	●	●	●
SURFYNOL® AS 5140	approx. 1.1	30	nd **	nd **	36	49	○	○	○
SURFYNOL® AS 5160	approx. 1.1	> 100	nd **	nd **	33	45	○	○	●
TEGOPREN® 5840	approx. 1.0	< RT	nd **	nd **	23	55	●	●	●
TEGOPREN® 5885	approx. 1.0	n.a. *	nd **	nd **	n.a. *	n.a. *	●	●	
TEGOPREN® 5890	approx. 1.0	< RT	nd **	nd **	48	61	●	●	

* product is not soluble in water

** not detected

*** 0.1% active in water; measurement took place at with BP100 from Krüss

● recommended ○ suitable



DISPERSING AGENTS

Dispersing agents are surface-active ingredients, which ease the incorporation of pigments and fillers into a liquid. Agglomerates are broken up by shearing so new surfaces are created. They are wetted by dispersing agents which stabi-

lize the aggregates of pigments or fillers. Dispersing agents have an amphiphilic structure which combines to meet the following requirements: Specific anchoring groups enable them to be strongly absorbed onto the particle

surface. As a second requirement the molecule must contain polymeric chains that give steric stabilization in the required system.

DISPERSING AGENTS FOR WATER-BASED AND REACTIVE RESIN ADHESIVES

Name	Chemical base	Delivered as	Ionogenicity	Appearance	Viscosity at 25 °C [mPas]
TEGOMER® DA 626	Polymeric nature	≥ 98% active concentrate	Nonionic	yellow to brown liquid	50000–150000
TEGOMER® DA 640	Polyether phosphate	30% active solution	Anionic	yellow to brown liquid	100–500
TEGOMER® DA 646	Modified Polyether	100% active concentrate	Nonionic	yellowish, clear liquid	200–800
TEGOMER® DA 850	Polymeric nature	40% active solution	Nonionic	amber liquid	100–500
ZETASPERSE® 3100	Polymeric nature	40% active solution	Anionic	amber liquid	approx. 500
CARBOWET® 109	Alcohol ethoxylate	100% active concentrate	Nonionic	clear, pale yellow liquid	50–70 (21 °C)
TEGOPREN® 5885	Siloxane based gemini surfactant	100% active concentrate	Nonionic	clear to slightly hazy liquid	approx. 100
TEGOPREN® 6875	Alkyl modified siloxane	100% active concentrate	Nonionic	colorless liquid	200–500

DISPERSING AGENTS FOR WATER-BASED AND REACTIVE RESIN ADHESIVES

Name	Density at 20 °C [g/m ³]	Dispersing of					Application area
		Chalk	Talc	Glass or polymeric fiber	Micronized filler	Organic pigments	
TEGOMER® DA 626	approx. 1.1	●	●		●	●	PUR, Epoxy systems, VE & UP resins
TEGOMER® DA 640	approx. 1.1	●	●				Water-based systems
TEGOMER® DA 646	approx. 1.1	●	●	●	●	●	Water-based systems, Epoxy systems, PUR, SMP
TEGOMER® DA 850	approx. 1.1	●	●			●	Water-based systems
ZETASPERSE® 3100	approx. 1.1	●	●		●	●	Water-based systems
TEGOPREN® 6875	approx. 0.9	●	●		●	●	Epoxy systems, VE & UP resins

● recommended



RHEOLOGY MODIFIERS

Thickeners are not only used to adjust the viscosity of an adhesive formulation, but also to influence the flow behavior of the adhesive which is important for the final application. For this purpose, we provide associative PUR thickeners, giving either Newtonian or pseudoplastic flow behavior.

When the shear stress is stopped the viscosity of the formulation containing the pseudoplastic thickener

returns to the starting value quickly, whereas the formulation containing the thixotropic thickener needs some time to recover.

In contrast to standard thickeners, our thickeners also operate at low pH values (<3).

TEGO® Rheo 8600 is fully compliant with EU 10/2011 and can be applied on all kinds of acrylics and even for

Vinyl-Acetate/Ethylene (VAE) Emulsions.

In acrylic dispersions TEGO® Rheo 8600 is

- 25–50% more efficient than other PUR thickeners
- it outperforms acrylic thickeners regarding electrolyte stability and water resistance.
- It shows efficient thickening even at low pH-values

RHEOLOGY MODIFIERS FOR WATER-BASED ADHESIVES

Name	Chemical base	Delivered as	Flow behaviour	Appearance	Viscosity at 25 °C [mPas]
TEGO® Rheo 8600	Polyurethane	25% active solution	Newtonian	colorless to yellowish liquid	approx. 26000
TEGO® Rheo 8510	Polyurethane	60% active solution	Pseudoplastic	colorless to yellowish liquid	9000 – 14000




Name	Density at 20 °C [g/m³]	VOC via DIN ISO 11890/2 [%]	SVOC via DIN ISO 11890/2 [%]	For application in water-based adhesive formulations based on			Conditions of use		
				Acrylics	SBR/NBR-Latex	PVAc/VAE/PVOH	pH 3-10	high electrolyte content	shear stable formulations
TEGO® Rheo 8600	approx. 1.1	nd *	nd *	●	●	○	●	●	●
TEGO® Rheo 8510	approx. 1.1	nd *	nd *	●	●	○	●	●	●


*not detected

● recommended

○ suitable

FOOD CONTACT COMPLIANCE

	Chemical base	Delivered as	EU10/2011	BfRxIV	SR 817.023.21 Annex10, list A or B	FDA 175.105	FDA 175.125	FDA 175.300	FDA 176.170	FDA 176.180	FDA 176.210	FDA 177.1210	FDA 177.2600	GB9685-2016
DEFOAMER														
TEGO® Antifoam 1488	Polyether siloxane	20% active emulsion	●	●	A	●	●	●	●	●	●			A2
TEGO® Antifoam 2-89	Polyether siloxane	20% active emulsion	-	●	A, B	●		●	●	●	●			-
TEGO® Antifoam 204	Polyether siloxane	20% active emulsion	●	●	A	●		●	●	●	●	●	●	-
TEGO® Antifoam 4-88	Polyether siloxane	40% active emulsion	●	●	A	●	●	●	●	●	●	●	●	
TEGO® Antifoam 4-94	Polyether siloxane	40% active emulsion	●	●	A	●	●	●	●	●	●	●	●	A2
TEGO® Antifoam KE 600 EC	Polyether + siloxane	60% active emulsion	●	●	A	●	●	●	●	●	●	●	●	A2
TEGO® Antifoam 2290	Paraffinic oil	100% active	-	●	A	●		●	●	●	●		●	-
TEGO® Antifoam 2291	Paraffinic oil	100% active	●	●	A	●	●	●	●	●	●	●	●	A1, A2, A5, A6
TEGO® Antifoam 2450 	Vegetable oil	100% active	●	●	A	●		●	●	●	●		●	A4, A6
TEGO® Antifoam 2458 	Vegetable oil	100% active	●	●	A	●		●	●	●				A1, A2, A6
TEGO® Antifoam 3045	Polyether	100% active	●	●	A	●	●	●	●	●	●			-
TEGO® Antifoam KS 53 	Vegetable oil	100% active	●	●	A	●	●	●	●	●	●	●	●	
TEGO® Antifoam D 2315	Polyether siloxane	100% active	●	●	B	●	●	●	●	●	●	●	●	-

 = biobased

● product is compliant to regulation as an additive and may be subject to any applicable limitations
 - not compliant
 For fields without an entry, the legislation has not been evaluated/reviewed.

This overview table is only for general information. For detailed information regarding a specific product please contact our Regulatory Guidance Team.
 The table is constantly updated based on changing legislation and information on products.
 Please contact our Regulatory Guidance Team in case different applications are needed than listed in this table.

Status 23.05.2023

FOOD CONTACT COMPLIANCE

	Chemical base	Delivered as	EU10/2011	BFRXIV	SR 817.023.21 Annex10, list A or B	FDA 175.105	FDA 175.125	FDA 175.300	FDA 176.170	FDA 176.180	FDA 176.210	FDA 177.1210	FDA 177.2600	GB9685-2016
WETTING AGENTS														
Surfynol® AS 5000	Gemini surfactant, acetylenic	50% active solution	-	-	A	●		●						A2, A5
Surfynol® AS 5020	Ethoxylated gemini surfactant, acetylenic	100% active concentrate	-	-	A	●		●	●	●				A2
Surfynol® AS 5040	Ethoxylated gemini surfactant, acetylenic	100% active concentrate	-	-	A	●		●	●	●				A2
Surfynol® AS 5060	Alkoxyated gemini surfactant, acetylenic	100% active concentrate	-	-	A	●				●				-
Surfynol® AS 5100	Blend of acetylenic gemini and anionic surfactants	81% active concentrate	-	-	A	●	●	●	●	●				A2
Surfynol® AS 5120	Anionic surfactant blend	75% active concentrate	●	●	A	●		●	●	●	●			A1, A6
Surfynol® AS 5140	Anionic surfactant blend	85% active concentrate	●	●	A	●			●					A1, A6
Surfynol® AS 5160	Anionic surfactant	75% active concentrate	●	●	A	●	●	●	●	●	●			A1, A2, A5, A6
TEGOPREN® 5840	Organommodified Siloxane	100% active concentrate	-	-	B	●					●			-
TEGOPREN® 5885	Siloxane based gemini surfactant	100% active concentrate	-	-	B	●					●			-
TEGOPREN® 5890	Organommodified Siloxane	100% active concentrate	●	●	A	●	●	●	●	●				A2, A6

● product is compliant to regulation as an additive and may be subject to any applicable limitations
 - not compliant
 For fields without an entry, the legislation has not been evaluated/reviewed.

This overview table is only for general information. For detailed information regarding a specific product please contact our Regulatory Guidance Team.
 The table is constantly updated based on changing legislation and information on products.
 Please contact our Regulatory Guidance Team in case different applications are needed than listed in this table.

Status 23.05.2023

FOOD CONTACT COMPLIANCE

	Chemical base	Delivered as	EU10/2011	BfRxIV	SR 817.023.21 Annex10, list A or B	FDA 175.105	FDA 175.125	FDA 175.300	FDA 176.170	FDA 176.180	FDA 176.210	FDA 177.1210	FDA 177.2600	GB9685-2016
RHEOLOGY MODIFIER														
TEGO® RHEO 8600	Polyurethane	25% active solution	●	●	A	●	●	●	●	●				-
EMULSIFIER														
REWOPOL® SB FA 50	Ethoxylated sulfosuccinate	30–32% active solution	●	●	-	●			●					
REWOPOL® SB DO 75	Sodium diisooctyl sulfosuccinate	75% active solution	●	●	A	●	●	●	●	●	●			A1, A2, A5, A6
REWOPOL® V 10033	Sodium fatty alkanolamide sulfosuccinate	36–39% active solution		●		●		●	●	●				

● product is compliant to regulation as an additive and may be subject to any applicable limitations
 – not compliant
 For fields without an entry, the legislation has not been evaluated/reviewed.

This overview table is only for general information. For detailed information regarding a specific product please contact our Regulatory Guidance Team.
 The table is constantly updated based on changing legislation and information on products.
 Please contact our Regulatory Guidance Team in case different applications are needed than listed in this table.

Status 23.05.2023

FOOD CONTACT COMPLIANCE

	Chemical base	Delivered as	EU10/2011	BfRXIV	SR 817.023.21 Annex10, list A or B	FDA 175.105	FDA 175.125	FDA 175.300	FDA 176.170	FDA 176.180	FDA 176.210	FDA 177.1210	FDA 177.2600	GB9685-2016
DISPERSING AGENT														
TEGOMER® DA 626	Polymeric nature	≥ 98% active concentrate	-	-	B	-	-	-	-	-	-	-	-	-
TEGOMER® DA 640	Polyether phosphate	30% active solution	-	-	B	-	-	-	-	-	-	-	-	-
TEGOMER® DA 646	Modified Polyether	100% active concentrate	-	-	-	-	-	-	-	-	-	-	-	-
TEGOMER® DA 850	Polymeric nature	40% active solution	-	-	B	●	●	●	●	●	-	-	-	-
ZETASPERSE® 3100	Polymeric nature	40% active solution	-	-	-	-	-	-	-	-	-	-	-	-
TEGOPREN® 6875	Alkyl modified siloxane	100% active concentrate	-	-	-	-	-	-	-	-	-	-	-	-
TEGOPREN® 5885	Siloxane based gemini surfactant	100% active concentrate	-	-	B	●	-	-	-	-	●	-	-	-

● product is compliant to regulation as an additive and may be subject to any applicable limitations
 - not compliant
 For fields without an entry, the legislation has not been evaluated/reviewed.

This overview table is only for general information. For detailed information regarding a specific product please contact our Regulatory Guidance Team.
 The table is constantly updated based on changing legislation and information on products.
 Please contact our Regulatory Guidance Team in case different applications are needed than listed in this table.

Status 23.05.2023

Europe | Middle East | Africa

Evonik Operations GmbH
Goldschmidtstraße 100
45127 Essen
Germany
Phone +49 201 173-2665
Fax +49 201 173-1990
www.evonik.com

Asia | Pacific

**Evonik Specialty Chemicals
(Shanghai) Co., Ltd.**
55, Chungong Road
Xinzhuang Industry Park
Shanghai, 201108
PR China
Phone +86 21 6119-1125
Fax +86 21 6119-1406

The Americas

Evonik Corporation
7801 Whitepine Road
Richmond, VA 23237
USA
Phone +1 804 727-0700
Fax +1 804 727-0855

Inv.-Nr.: 03-2025

This information and any recommendations, technical or otherwise, are presented in good faith and believed to be correct as of the date prepared. Recipients of this information and recommendations must make their own determination as to its suitability for their purposes. In no event shall Evonik assume liability for damages or losses of any kind or nature that result from the use of or reliance upon this information and recommendations. EVONIK EXPRESSLY DISCLAIMS ANY REPRESENTATIONS AND WARRANTIES OF ANY

KIND, WHETHER EXPRESS OR IMPLIED, AS TO THE ACCURACY, COMPLETENESS, NON-INFRINGEMENT, MERCHANTABILITY AND/OR FITNESS FOR A PARTICULAR PURPOSE (EVEN IF EVONIK IS AWARE OF SUCH PURPOSE) WITH RESPECT TO ANY INFORMATION AND RECOMMENDATIONS PROVIDED. Reference to any trade names used by other companies is neither a recommendation nor an endorsement of the corresponding product, and does not imply that similar products

could not be used. Evonik reserves the right to make any changes to the information and/or recommendations at any time, without prior or subsequent notice.



evonik.click/solutions-for-adhesives